

Panasonic

NEW

Compact
Light Curtain

Type4 PLe SIL3

SF4B-C SERIES



Conforming to Machine
& EMC Directive



Certified



Certified by NRTL

Conforming to
OSHA/ANSI



Certified

Introducing the Type 4 Compact Light Curtain



Compact, light weight design, and advanced functionality in one package: A new concept “Compact Light Curtain”

The **SF4B-C** series comes in the size of 20 (W) × 27.4 (D) mm **0.787 (W) × 1.079 (D) in**, which is designed to be compact, light weight and easy to install. We offer the extensive selection of safety features including muting and blanking.

Compact
design

Light
weight

High
functionality



Compact Light Curtain
SF4B-C SERIES

Fit onto aluminum
frame perfectly




Compact design

Compact profile design, maximize the machinery opening area

The SF4B-C series is designed to fit onto an aluminum frame, maximizing the machinery opening area. It can even allow zero dead zone.

Width

Just **20 mm** **0.787 in**

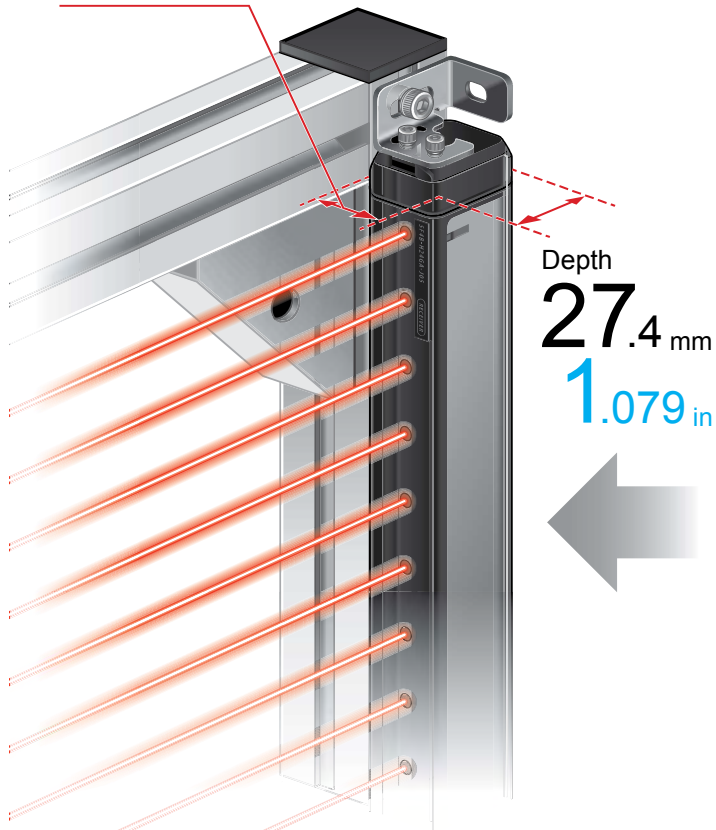


Side mounting

- The presence of light curtain does not narrow the opening area.
- The light curtain is thin, so its bulge from frame can be minimized.


* When using standard mounting brackets (optional)

Issues when installing on the inside of the machinery opening area

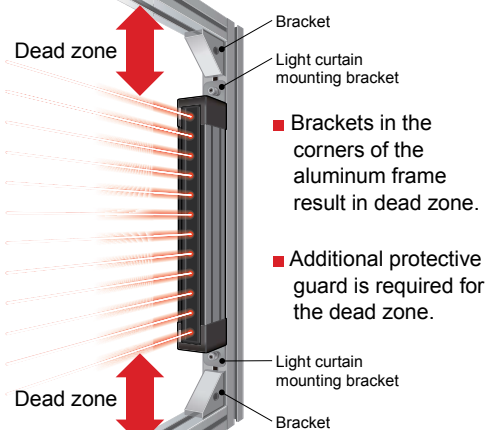

- Brackets in the corners of the aluminum frame result in dead zone.
- Additional protective guard is required for the dead zone.


Buried mounting (side)



- The light curtain fits onto frame perfectly, even in embedded installations.
- The light curtain protrudes neither into the machinery opening nor outside the frame.
- The light curtain will not be damaged due to collision with workpiece.

* When using standard mounting brackets (optional)

Rear mounting



- The light curtain fits onto a 20 × 20 mm **0.787 × 0.787 in** aluminum frame perfectly.
- The light curtain does not protrude from the frame.

* When using standard mounting brackets (optional)

Light weight

Plastic × metal

The **SF4B-C** series features a proprietary double structure of a “plastic body” with a “metal inner frame” which lightens the weight while maintaining the durability.



Metal inner frame

Plastic seamless enclosure

* This is an only image for seamless enclosure partially cut.




Durable Light

45% lighter* for easy installation in high places and when mounting long models

Thanks to its plastic body, the **SF4B-C** series is 45% lighter* than previous models with aluminum enclosures. This helps to reduce the overall weight of the equipment during transport and when shipping it overseas.

* Comparing SF4B-H80 <V2> with SF4B-H80CA-J05

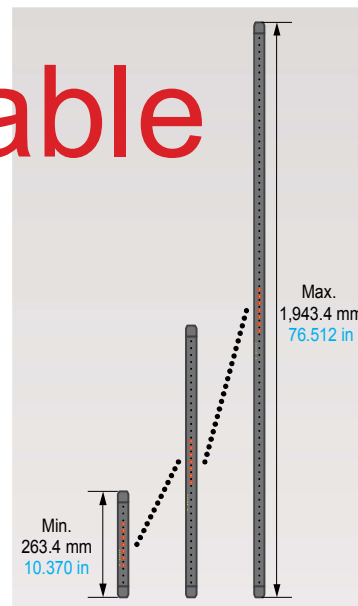

Maximum protection height of 1,943.4 mm
76.512 in

Despite its compact, plastic body, the **SF4B-C** series features a metal inner frame that increases toughness and also keeps its enclosure not to curve. Protective heights range from 263.4 mm to 1,943.4 mm **10.370 in to 76.512 in**.


High functionality

Large multi-purpose indicator (SF4B-□CA-J05 only)

The **SF4B-C** series incorporates a large multi-purpose indicator (orange) positioned around workers' eye level. The indicator shows the presence of the light curtain, helping to prevent unintentional beam interruption. The indicator can be used in a variety of applications such as a muting indicator and work indicator.


Exceptional visibility with wide angle

The large multi-purpose indicator shines brightly through the plastic body to ensure exceptional visibility.

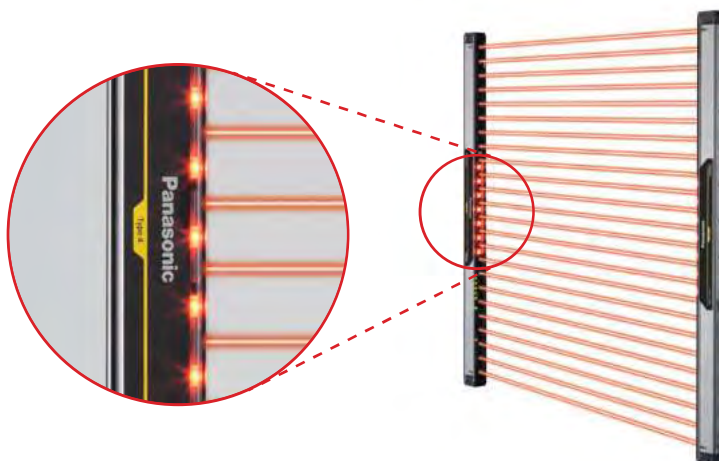


High functionality

Handy-controller SFB-HC (optional) offers easy access to settings for a range of functionality

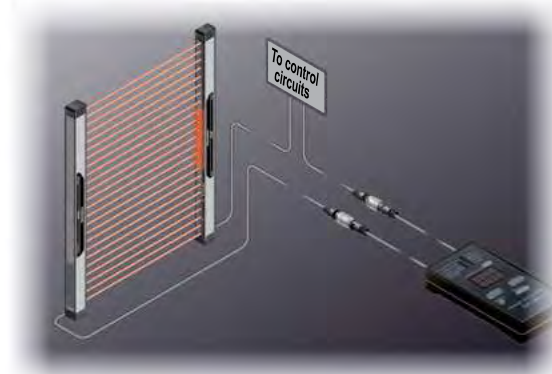


Muting control function for individual beams: Limit the muting area (SF4B-□CA-J05 only)

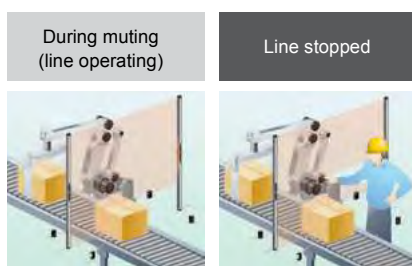

The **SFB-HC** handy-controller (optional) allows to perform muting control for certain beams only. Since beam channels can be specified, so there is no need to install a separate guard to prevent intrusions. For example, according to the height of a sensing object, when muting control from the lowermost beam channel to the 10th beam channel is activated, the light curtain will detect any beam interruption at the 11th or higher beam channel as a human entry and stop the machinery.

Fixed blanking function: Choose active beam channels

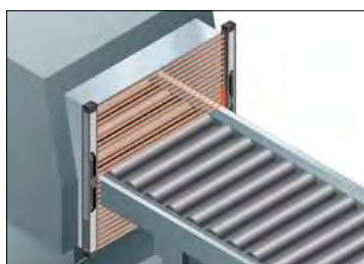

The **SFB-HC** handy-controller provides a fixed blanking function that prevents control output (OSSD) from turning off even if certain beam channels are interrupted. This function is convenient for applications where an obstacle always interrupts certain beam channels. Additionally, it is safe since control output (OSSD) is forcibly turned off in the event the obstruction moves outside the detection area.

Floating blanking function: Disable unspecified beams



The floating blanking function allows to disable up to three unspecified beam channels. Control output (OSSD) will not turn off as long as the number of interrupted beam channels is less than the set number of beam channels. This function is convenient when an obstruction moves inside the detection area during setup changes or when loading materials within the detection area of light curtain.
*The min. sensing object will change when the floating blanking function is used.

Use output and indicators to achieve preventive maintenance when the incident light intensity gets unstable

By setting the auxiliary output switching function to off or on when light reception becomes unstable, the light curtain provides notification in the event of a reduction in the incident light intensity due to beam misalignment or dirt via auxiliary output (non-safety output) in addition to the incident light intensity indicator.

| Incident light intensity indicator | | Auxiliary output | |
|------------------------------------|---|---|--|
| | | Set to off for unstable incident light (Note 3) | Set to on for unstable incident light (Note 3) |
| Incident light intensity (Note 1) | 130 % | ON | OFF |
| | 100 % | OFF | ON |
| | When light is interrupted (Note 2): Off | — | — |


- Notes: 1) An incident light intensity value of 100 % refers to the threshold value at which control outputs (OSSD1, OSSD2) change from off to on.
2) Interruption of the light refers to the presence of an object interrupting beam in the detection area.
3) This setting is not available when using muting control for individual beams, fixed blanking, or floating blanking.

High functionality

Extensive array of other functions

- **PNP / NPN polarity support**
Since a single model number can be switched between PNP and NPN input, fewer model numbers need to be registered.
- **External device monitor function**
External devices (such as safety relays, etc.) can be directly connected to the handy-controller without any dedicated unit, simplifying installation, reducing costs, and helping to avoid various problems.
- **Extraneous light check & avoid (ELCA) function**
The ELCA function reduces interference without an interference prevention line.
- **Beam-axis alignment indicator**
Beam-axis alignment indicators are indicated in 4 blocks, allowing to see at a glance where light is being received.

PRODUCT CONFIGURATION

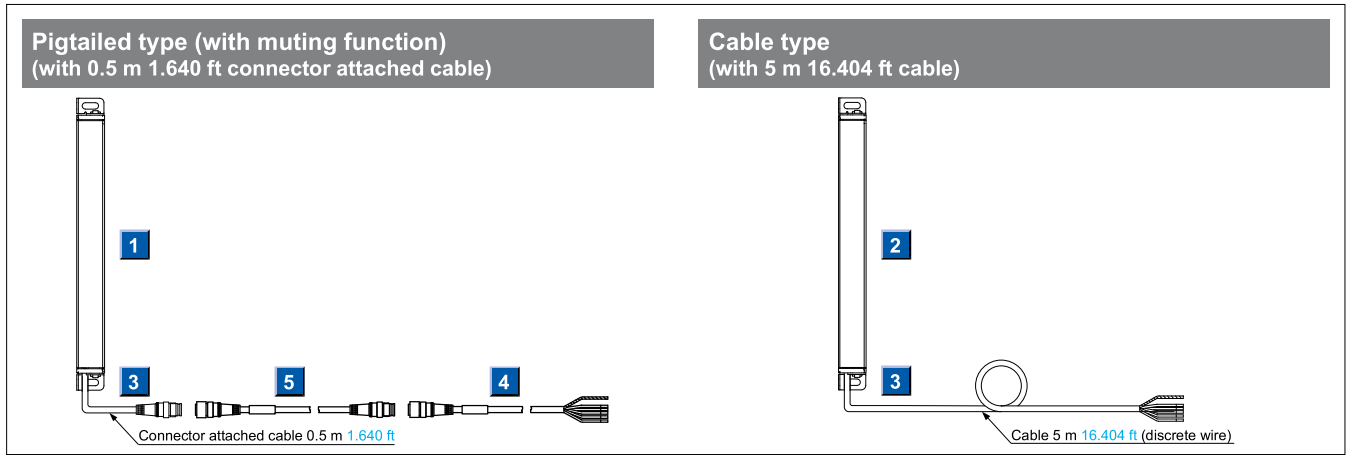


ORDER GUIDE

1 2 Light curtains

| Type | Appearance | Operating range (Note 1) | Model No. (Note 2) | | Number of beam channels | Protective height |
|---|------------|----------------------------------|---|--------------|-------------------------|----------------------|
| | | | 1 Pigtailed type (with muting function) | 2 Cable type | | |
| Hand protection type Min. sensing object $\phi 25$ mm $\phi 0.984$ in (20 mm 0.787 in beam pitch) | | 0.3 to 7 m 0.984 to 22.966 ft | SF4B-H12CA-J05 | SF4B-H12C | 12 | 263.4 mm 10.370 in |
| | | | SF4B-H16CA-J05 | SF4B-H16C | 16 | 343.4 mm 13.520 in |
| | | | SF4B-H20CA-J05 | SF4B-H20C | 20 | 423.4 mm 16.669 in |
| | | | SF4B-H24CA-J05 | SF4B-H24C | 24 | 503.4 mm 19.819 in |
| | | | SF4B-H28CA-J05 | SF4B-H28C | 28 | 583.4 mm 22.969 in |
| | | | SF4B-H32CA-J05 | SF4B-H32C | 32 | 663.4 mm 26.118 in |
| | | | SF4B-H36CA-J05 | SF4B-H36C | 36 | 743.4 mm 29.268 in |
| | | | SF4B-H40CA-J05 | SF4B-H40C | 40 | 823.4 mm 32.417 in |
| | | | SF4B-H48CA-J05 | SF4B-H48C | 48 | 983.4 mm 38.717 in |
| | | | SF4B-H56CA-J05 | SF4B-H56C | 56 | 1,143.4 mm 45.016 in |
| | | | SF4B-H64CA-J05 | SF4B-H64C | 64 | 1,303.4 mm 51.315 in |
| | | | SF4B-H72CA-J05 | SF4B-H72C | 72 | 1,463.4 mm 57.614 in |
| | | | SF4B-H80CA-J05 | SF4B-H80C | 80 | 1,623.4 mm 63.913 in |
| | | | SF4B-H88CA-J05 | SF4B-H88C | 88 | 1,783.4 mm 70.212 in |
| SF4B-H96CA-J05 | SF4B-H96C | 96 | 1,943.4 mm 76.512 in | | | |
| Arm / Foot protection type Min. sensing object $\phi 45$ mm $\phi 1.772$ in (40 mm 1.575 in beam pitch) | | 0.3 to 7 m 0.984 to 22.966 ft | SF4B-A8CA-J05 | SF4B-A8C | 8 | 343.4 mm 13.520 in |
| | | | SF4B-A12CA-J05 | SF4B-A12C | 12 | 503.4 mm 19.819 in |
| | | | SF4B-A16CA-J05 | SF4B-A16C | 16 | 663.4 mm 26.118 in |
| | | | SF4B-A20CA-J05 | SF4B-A20C | 20 | 823.4 mm 32.417 in |
| | | | SF4B-A24CA-J05 | SF4B-A24C | 24 | 983.4 mm 38.717 in |
| | | | SF4B-A28CA-J05 | SF4B-A28C | 28 | 1,143.4 mm 45.016 in |
| | | | SF4B-A32CA-J05 | SF4B-A32C | 32 | 1,303.4 mm 51.315 in |
| | | | SF4B-A36CA-J05 | SF4B-A36C | 36 | 1,463.4 mm 57.614 in |
| | | | SF4B-A40CA-J05 | SF4B-A40C | 40 | 1,623.4 mm 63.913 in |
| | | | SF4B-A44CA-J05 | SF4B-A44C | 44 | 1,783.4 mm 70.212 in |
| SF4B-A48CA-J05 | SF4B-A48C | 48 | 1,943.4 mm 76.512 in | | | |

Notes: 1) The operating range is the distance possible to set between the emitter and the receiver.

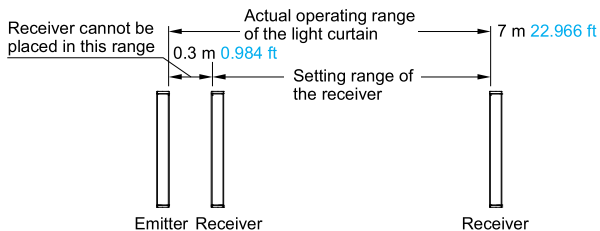

2) The model No. with "E" shown on the label affixed to the product is the emitter, "D" shown on the label is the receiver.


ORDER GUIDE

3 Mounting brackets Mounting bracket is not supplied with the light curtain. Be sure to order it separately.

| Designation | Appearance | Model No. | Description |
|---|------------|---------------------------------|---|
| Standard mounting bracket | | MS-SF4BC-1 | Allows the light curtain to be mounted on the rear or side of the target equipment. Designed for use with one M5 hexagon-socket head bolt. (4 pcs. per set for the emitter and receiver) |
| Rear utility mounting bracket | | MS-SF4BC-2 | Allows the light curtain to be mounted on the rear of the target equipment. Allows beam adjustment. Designed for use with one M5 hexagon-socket head bolt. For space-saving mounting, use one M5 hexagon head bolt. (4 pcs. per set for the emitter and receiver) |
| Side utility mounting bracket | | MS-SF4BC-3 | Allows the light curtain to be mounted on the side of the target equipment. Allows beam adjustment. Designed for use with one M5 hexagon-socket head bolt. For space-saving mounting, use one M5 hexagon head bolt. (4 pcs. per set for the emitter and receiver) |
| Intermediate supporting bracket for utility mounting bracket (Note 1) | | MS-SF4BC-4 | Supports the middle of the light curtain when installing it with utility mounting brackets. Allows the light curtain to be mounted on the rear or side of the target equipment. Allows beam adjustment. Designed for use with one M5 hexagon head bolt. (2 pcs. each per set for rear mounting and side mounting) |
| Intermediate supporting bracket for standard mounting bracket (Note 1) | | MS-SF4BC-5 | Supports the middle of the light curtain when installing it with standard mounting brackets. Allows the light curtain to be mounted on the rear or side of the target equipment. Designed for use with two M3 countersunk screws. (2 pcs. each per set for rear mounting and side mounting) |
| Side mounting bracket | | NEW MS-SF4BC-6 | Allows beam axis alignment and the light curtain to be mounted on the device in confined spaces. Designed for use with one M5 hexagon-socket head bolt. (4 pcs. per set for the emitter and receiver) |
| Intermediate supporting bracket for use with side mounting bracket (Note 1) | | NEW MS-SF4BC-7 | Supports the middle of the light curtain when installing it with side mounting brackets. Allows beam axis alignment and the light curtain to be mounted on the device in confined spaces. Designed for use with one M5 hexagon-socket head bolt. (2 pcs. per set) |


Note 1: The numbers of sets required by SF4B-H□C (A-J05) (40 or more beam axes) and SF4B-A□C (A-J05) (20 or more beam axes) are as follows:
SF4B-H40C (A-J05), SF4B-H48C (A-J05), SF4B-H56C (A-J05), SF4B-A20C (A-J05), SF4B-A24C (A-J05), SF4B-A28C (A-J05): 1 set
SF4B-H64C (A-J05), SF4B-H72C (A-J05), SF4B-H80C (A-J05), SF4B-H88C (A-J05), SF4B-H96C (A-J05), SF4B-A32C (A-J05), SF4B-A36C (A-J05), SF4B-A40C (A-J05), SF4B-A44C (A-J05), SF4B-A48C (A-J05): 2 sets

Standard mounting bracket and intermediate supporting bracket for standard mounting bracket

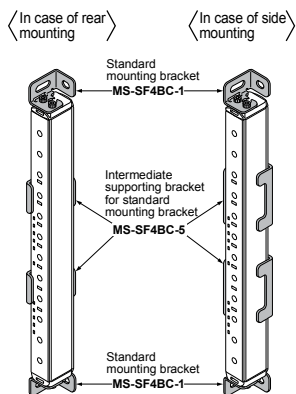


- **MS-SF4BC-1**
Four brackets (two each R and L type) per set
(Eight M3 (length: 5 mm 0.197 in) hexagon-socket head bolts and four M5 flat washers are attached.)
- **MS-SF4BC-5**
Two pcs. for rear mounting, two pcs. for side mounting

Rear utility mounting bracket and intermediate supporting bracket for utility mounting bracket

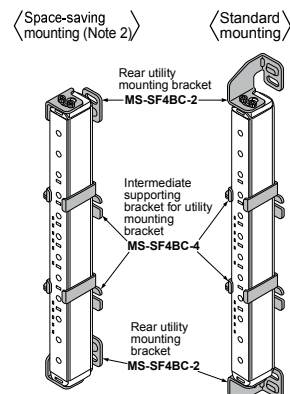


- **MS-SF4BC-2**
Four brackets (two each R and L type) per set
(Eight M3 (length: 6 mm 0.236 in) hexagon-socket head bolts and four M5 flat washers are attached.)
- **MS-SF4BC-4**
Two brackets per set
(M5 flat washers, two pcs. assembled M3 (length: 6 mm 0.236 in) hexagon-socket head bolts for rear mounting, two pcs. attachments for side mounting)

Side utility mounting bracket and intermediate supporting bracket for utility mounting bracket

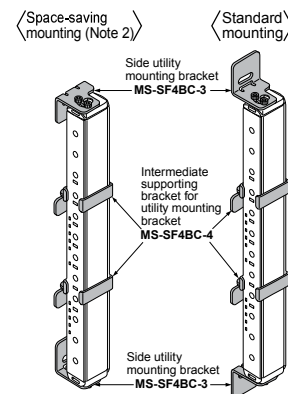

- **MS-SF4BC-3**
Four brackets (two each R and L type) per set
(Eight M3 (length: 6 mm 0.236 in) hexagon-socket head bolts and four M5 flat washers are attached.)
- **MS-SF4BC-4**
Two brackets per set
(M5 flat washers, two pcs. assembled M3 (length: 6 mm 0.236 in) hexagon-socket head bolts for rear mounting, two pcs. attachments for side mounting)

Side mounting bracket and intermediate supporting bracket for use with side mounting bracket

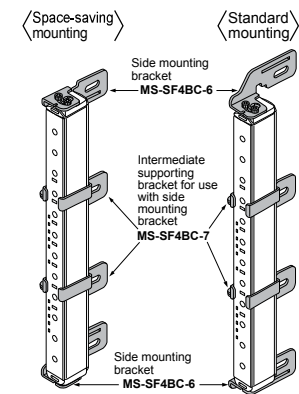



- **MS-SF4BC-6**
Four brackets (two each R and L type) per set
(Eight M3 (length: 6 mm 0.236 in) hexagon-socket head bolts and four M5 flat washers are attached.)
- **MS-SF4BC-7**
Two brackets per set
(Two pcs. M5 flat washers, two pcs. assembled M3 (length: 6 mm 0.236 in) hexagon-socket head bolts for side mounting)

Note 2: For space-saving mounting, use an M5 hexagon head bolt

ORDER GUIDE

4 5 Mating cables


| Type | Appearance | Model No. | Description | |
|--|---|---|---|--|
| Mating cables With connector on one end |  | SFB-CC3-MU | Length: 3 m 9.843 ft Net weight: 430 g approx. (2 cables) | |
| | | SFB-CC7-MU | Length: 7 m 22.966 ft Net weight: 1,000 g approx. (2 cables) | |
| | | SFB-CC10-MU | Length: 10 m 32.808 ft Net weight: 1,300 g approx. (2 cables) | |
| | Mating cables With connectors on both ends |  | For emitter | SFB-CCJ3E-MU |
| For receiver | | | SFB-CCJ10E-MU | Length: 10 m 32.808 ft Net weight: 660 g approx. (1 cable) |
| | | | SFB-CCJ3D-MU | Length: 3 m 9.843 ft Net weight: 210 g approx. (1 cable) |
| | | | SFB-CCJ10D-MU | Length: 10 m 32.808 ft Net weight: 680 g approx. (1 cable) |

Spare parts (Accessories for light curtain)



| Designation | Model No. | Description |
|--------------|------------------|--|
| Test rod ø25 | SF4B-TR25 | Min. sensing object for regular checking (ø25 mm ø0.984 in), for hand protection type (min. sensing object ø25 mm ø0.984 in) |



OPTIONS

Control units

| Designation | Appearance | Model No. | Description |
|------------------------|---|---------------|--|
| Slim type control unit |  | SF-C13 | Use a discrete wire cable to connect to the light curtain. Muting function can be used. Compatible with up to Control Category 4. When connecting pigtailed type (with muting function) SF4B-□CA-J05 , be sure to order a mating cable separately. • Mating cable: SFB-CC-□-MU • Extension cable: SFB-CCJ-□-MU |

Handy-controller

| Designation | Appearance | Model No. |
|-------------------------------------|--|-----------------|
| Handy-controller |  * 2 adapter cables included | SFB-HC |
| Cable set for cable type connection |  | SFC-WNC1 |

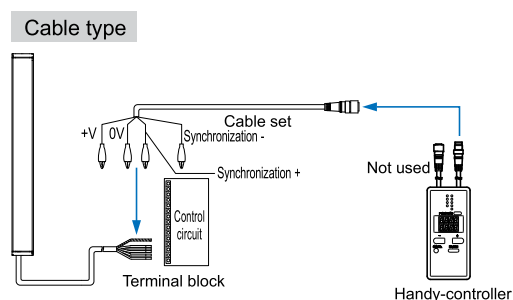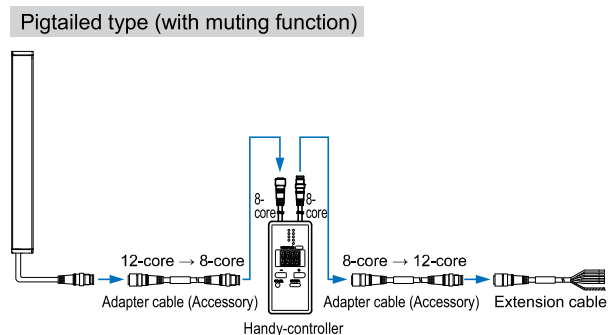

OPTIONS

Metal protection case On sale soon

| Designation | | Metal protection case |
|--------------------------|----------------------------|-----------------------|
| Applicable beam channels | | |
| Hand protection type | Arm / Foot protection type | Model No. |
| 12 | — | MS-SF4BCH-12 |
| 16 | 8 | MS-SF4BCH-16 |
| 20 | — | MS-SF4BCH-20 |
| 24 | 12 | MS-SF4BCH-24 |
| 28 | — | MS-SF4BCH-28 |
| 32 | 16 | MS-SF4BCH-32 |
| 36 | — | MS-SF4BCH-36 |
| 40 | 20 | MS-SF4BCH-40 |
| 48 | 24 | MS-SF4BCH-48 |
| 56 | 28 | MS-SF4BCH-56 |
| 64 | 32 | MS-SF4BCH-64 |
| 72 | 36 | MS-SF4BCH-72 |
| 80 | 40 | MS-SF4BCH-80 |
| 88 | 44 | MS-SF4BCH-88 |
| 96 | 48 | MS-SF4BCH-96 |

• MS-SF4BCH-□




Others

| Designation | Model No. | Description |
|--------------------------------------|------------------|---|
| Test rod ø45 | SF4B-TR45 | Min. sensing object for regular checking (ø45 mm $\phi 1.772$ in), for arm / foot protection type (min. sensing object ø45 mm $\phi 1.772$ in) |
| Large display unit for light curtain | SF-IND-2 | <p>With the auxiliary output of the light curtain, the operation is easily observable from various directions.</p> <p>Specifications</p> <ul style="list-style-type: none"> • Supply voltage: 24 V DC $\pm 15\%$ • Current consumption: 12 mA or less • Indicators: Orange LED (8 pcs. used) [Light up when external contact is ON] • Ambient temperature: -10 to $+55$ °C $+14$ to $+131$ °F (No dew condensation or icing allowed) • Material: POM (Enclosure) Polycarbonate (Cover) Cold rolled carbon steel (SPCC) (Bracket) • Cable: 0.3 mm² 2-core cable, 3 m 9.843 ft long • Weight: 70 g approx. (including bracket) |

Large display unit for light curtain


• SF-IND-2



* Cannot be attached together with a mounting bracket to the light curtain using a single bolt.

• Recommended safety relay

Safety relay
Panasonic Corporation
SF series

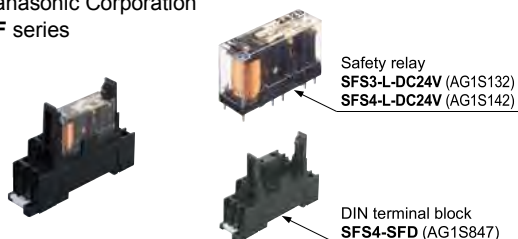

Note: Contact Panasonic Corporation for details on the recommended products.

| Type | With LED indicator | | |
|----------------------------------|--------------------|--|-------------------|
| | Model No. | SFS3-L-DC24V | SFS4-L-DC24V |
| Item | Part No. | AG1S132 | AG1S142 |
| Contact arrangement | | 3a1b | 4a2b |
| Rated nominal switching capacity | | 6 A / 250 V AC, 6 A / 30 V DC | |
| Min. switching capacity | | 1 mA / 5 V DC | |
| Coil rating | | 15 mA / 24 V DC | 20.8 mA / 24 V DC |
| Rated power consumption | | 360 mW | 500 mW |
| Operation time | | 20 ms or less | |
| Release time | | 20 ms or less | |
| Ambient temperature | | -40 to $+85$ °C -40 to $+185$ °F (Humidity: 5 to 85 % RH) | |
| Applicable standards | | UL, C-UL, TÜV | |

SPECIFICATIONS

Light curtain individual specifications

SF4B-H□C (A-J05)

| Item | Model No. | Type | Min. sensing object $\varnothing 25$ mm $\varnothing 0.984$ in (20 mm 0.787 in beam pitch) | | | | | | |
|---|----------------|--|--|----------------------|-----------------------|---|-----------------------|--|-----------------------|
| | | Pigtailed type | SF4B-H12CA-J05 | SF4B-H16CA-J05 | SF4B-H20CA-J05 | SF4B-H24CA-J05 | SF4B-H28CA-J05 | SF4B-H32CA-J05 | SF4B-H36CA-J05 |
| | | Cable type | SF4B-H12C | SF4B-H16C | SF4B-H20C | SF4B-H24C | SF4B-H28C | SF4B-H32C | SF4B-H36C |
| Number of beam channels | | | 12 | 16 | 20 | 24 | 28 | 32 | 36 |
| Protective height | | | 263.4 mm 10.37 in | 343.4 mm 13.52 in | 423.4 mm 16.669 in | 503.4 mm 19.819 in | 583.4 mm 22.969 in | 663.4 mm 26.118 in | 743.4 mm 29.268 in |
| Current consumption | Cable type | | Emitter: 65 mA or less, Receiver: 75 mA or less | | | Emitter: 70 mA or less Receiver: 85 mA or less | | Emitter: 75 mA or less Receiver: 95 mA or less | |
| | Pigtailed type | When large multi-purpose indicator turns OFF | | | | | | | |
| | Pigtailed type | When large multi-purpose indicator lights up | Emitter: 75 mA or less, Receiver: 85 mA or less | | | Emitter: 80 mA or less Receiver: 95 mA or less | | Emitter: 85 mA or less Receiver: 105 mA or less | |
| PFH ₀ (Note) | | | 1.9×10^{-9} | 2.1×10^{-9} | 2.4×10^{-9} | 2.6×10^{-9} | 2.8×10^{-9} | 3.0×10^{-9} | 3.3×10^{-9} |
| MTTFd (Note) | | | 100 years or more | | | | | | |
| Net weight (Total of emitter and receiver) | Pigtailed type | | Approx. 360 g | Approx. 430 g | Approx. 520 g | Approx. 590 g | Approx. 680 g | Approx. 750 g | Approx. 840 g |
| | Cable type | | Approx. 700 g | Approx. 770 g | Approx. 860 g | Approx. 930 g | Approx. 1,000 g | Approx. 1,100 g | Approx. 1,200 g |

| Item | Model No. | Type | Min. sensing object $\varnothing 25$ mm $\varnothing 0.984$ in (20 mm 0.787 in beam pitch) | | | | | | |
|---|----------------|--|--|-----------------------|--|-------------------------|---|-------------------------|---|
| | | Pigtailed type | SF4B-H40CA-J05 | SF4B-H48CA-J05 | SF4B-H56CA-J05 | SF4B-H64CA-J05 | SF4B-H72CA-J05 | SF4B-H80CA-J05 | SF4B-H88CA-J05 |
| | | Cable type | SF4B-H40C | SF4B-H48C | SF4B-H56C | SF4B-H64C | SF4B-H72C | SF4B-H80C | SF4B-H88C |
| Number of beam channels | | | 40 | 48 | 56 | 64 | 72 | 80 | 88 |
| Protective height | | | 823.4 mm 32.417 in | 983.4 mm 38.717 in | 1,143.4 mm 45.016 in | 1,303.4 mm 51.315 in | 1,463.4 mm 57.614 in | 1,623.4 mm 63.913 in | 1,783.4 mm 70.212 in |
| Current consumption | Cable type | | Emitter: 80 mA or less Receiver: 100 mA or less | | Emitter: 85 mA or less Receiver: 120 mA or less | | Emitter: 95 mA or less Receiver: 130 mA or less | | Emitter: 100 mA or less Receiver: 140 mA or less |
| | Pigtailed type | When large multi-purpose indicator turns OFF | | | | | | | |
| | Pigtailed type | When large multi-purpose indicator lights up | Emitter: 90 mA or less Receiver: 110 mA or less | | Emitter: 95 mA or less Receiver: 130 mA or less | | Emitter: 105 mA or less Receiver: 140 mA or less | | Emitter: 110 mA or less Receiver: 155 mA or less |
| PFH ₀ (Note) | | | 3.5×10^{-9} | 3.9×10^{-9} | 4.4×10^{-9} | 4.8×10^{-9} | 5.3×10^{-9} | 5.7×10^{-9} | 6.2×10^{-9} |
| MTTFd (Note) | | | 100 years or more | | | | | | |
| Net weight (Total of emitter and receiver) | Pigtailed type | | Approx. 910 g | Approx. 1,100 g | Approx. 1,300 g | Approx. 1,400 g | Approx. 1,600 g | Approx. 1,700 g | Approx. 1,800 g |
| | Cable type | | Approx. 1,300 g | Approx. 1,400 g | Approx. 1,600 g | Approx. 1,700 g | Approx. 2,000 g | Approx. 2,000 g | Approx. 2,100 g |

Note: PFH₀: Probability of dangerous failure per hour, MTTFd: Mean time to dangerous failure.

SF4B-A□C (A-J05)

| Item | Model No. | Type | Min. sensing object $\varnothing 25$ mm $\varnothing 0.984$ in (20 mm 0.787 in beam pitch) | Min. sensing object $\varnothing 45$ mm $\varnothing 1.772$ in (40 mm 1.575 in beam pitch) | | | | | | |
|---|----------------|--|--|--|---|-----------------------|---|-----------------------|---|--|
| | | Pigtailed type | SF4B-H96CA-J05 | SF4B-A8CA-J05 | SF4B-A12CA-J05 | SF4B-A16CA-J05 | SF4B-A20CA-J05 | SF4B-A24CA-J05 | SF4B-A28CA-J05 | |
| | | Cable type | SF4B-H96C | SF4B-A8C | SF4B-A12C | SF4B-A16C | SF4B-A20C | SF4B-A24C | SF4B-A28C | |
| Number of beam channels | | | 96 | 8 | 12 | 16 | 20 | 24 | 28 | |
| Protective height | | | 1,943.4 mm 76.512 in | 343.4 mm 13.52 in | 503.4 mm 19.819 in | 663.4 mm 26.118 in | 823.4 mm 32.417 in | 983.4 mm 38.717 in | 1,143.4 mm 45.016 in | |
| Current consumption | Cable type | | Emitter: 105 mA or less Receiver: 145 mA or less | | Emitter: 60 mA or less Receiver: 70 mA or less | | Emitter: 65 mA or less Receiver: 75 mA or less | | Emitter: 70 mA or less Receiver: 85 mA or less | |
| | Pigtailed type | When large multi-purpose indicator turns OFF | | | | | | | | |
| | Pigtailed type | When large multi-purpose indicator lights up | Emitter: 115 mA or less Receiver: 155 mA or less | | Emitter: 70 mA or less Receiver: 80 mA or less | | Emitter: 75 mA or less Receiver: 85 mA or less | | Emitter: 80 mA or less Receiver: 95 mA or less | |
| PFH ₀ (Note) | | | 6.6×10^{-9} | 1.7×10^{-9} | 1.9×10^{-9} | 2.2×10^{-9} | 2.4×10^{-9} | 2.7×10^{-9} | 2.9×10^{-9} | |
| MTTFd (Note) | | | 100 years or more | 100 years or more | | | | | | |
| Net weight (Total of emitter and receiver) | Pigtailed type | | Approx. 1,900 g | Approx. 430 g | Approx. 590 g | Approx. 750 g | Approx. 910 g | Approx. 1,100 g | Approx. 1,300 g | |
| | Cable type | | Approx. 2,200 g | Approx. 770 g | Approx. 930 g | Approx. 1,100 g | Approx. 1,300 g | Approx. 1,400 g | Approx. 1,600 g | |

| Item | Model No. | Type | Min. sensing object $\varnothing 45$ mm $\varnothing 1.772$ in (40 mm 1.575 in beam pitch) | | | | |
|---|----------------|--|--|-------------------------|-------------------------|--|-------------------------|
| | | Pigtailed type | SF4B-A32CA-J05 | SF4B-A36CA-J05 | SF4B-A40CA-J05 | SF4B-A44CA-J05 | SF4B-A48CA-J05 |
| | | Cable type | SF4B-A32C | SF4B-A36C | SF4B-A40C | SF4B-A44C | SF4B-A48C |
| Number of beam channels | | | 32 | 36 | 40 | 44 | 48 |
| Protective height | | | 1,303.4 mm 51.315 in | 1,463.4 mm 57.614 in | 1,623.4 mm 63.913 in | 1,783.4 mm 70.212 in | 1,943.4 mm 76.512 in |
| Current consumption | Cable type | | Emitter: 75 mA or less Receiver: 95 mA or less | | | Emitter: 80 mA or less Receiver: 100 mA or less | |
| | Pigtailed type | When large multi-purpose indicator turns OFF | | | | | |
| | Pigtailed type | When large multi-purpose indicator lights up | Emitter: 85 mA or less Receiver: 105 mA or less | | | Emitter: 90 mA or less Receiver: 110 mA or less | |
| PFH ₀ (Note) | | | 3.2×10^{-9} | 3.4×10^{-9} | 3.7×10^{-9} | 3.9×10^{-9} | 4.2×10^{-9} |
| MTTFd (Note) | | | 100 years or more | | | | |
| Net weight (Total of emitter and receiver) | Pigtailed type | | Approx. 1,400 g | Approx. 1,600 g | Approx. 1,700 g | Approx. 1,800 g | Approx. 1,900 g |
| | Cable type | | Approx. 1,700 g | Approx. 2,000 g | Approx. 2,000 g | Approx. 2,100 g | Approx. 2,200 g |

Note: PFH₀: Probability of dangerous failure per hour, MTTFd: Mean time to dangerous failure.

SPECIFICATIONS

Light curtain common specifications

| Item | Model No. | Pigtailed type (with muting function) | | Cable type | |
|--|--|---|---|--|--|
| | | Min. sensing object ø25 mm ø0.984 in (20 mm 0.787 in beam pitch) | Min. sensing object ø45 mm ø1.772 in (40 mm 1.575 in beam pitch) | Min. sensing object ø25 mm ø0.984 in (20 mm 0.787 in beam pitch) | Min. sensing object ø45 mm ø1.772 in (40 mm 1.575 in beam pitch) |
| | | SF4B-H□CA-J05 | SF4B-A□CA-J05 | SF4B-H□C | SF4B-A□C |
| Applicable standards | International standard | IEC 61496-1/2 (Type 4), ISO 13849-1 (Category 4, PLe), IEC 61508-1 to 7 (SIL3) | | | |
| | Japan | JIS B 9704-1/2 (Type 4), JIS B 9705-1 (Category 4), JIS C 5008 (SIL3) | | | |
| | Europe (EU) (Note 2) | EN 61496-1 (Type 4), EN ISO 13849-1 (Category 4, PLe), EN 61508-1 to 7 (SIL3), EN 55011, EN 50178, EN 61000-6-2 | | | |
| | North America (Note 3) | ANSI/UL 61496-1/2 (Type 4), ANSI/UL 508, CAN/CSA 61496-1/2 (Type 4), CAN/CSA C22.2 No.14, OSHA 1910.212, OSHA 1910.217(C), ANSI B11.1 to B11.19, ANSI/RIA 15.06 | | | |
| | South Korea (S-Mark) | S1-G-35-2005, S2-W-11-2003 | | | |
| Operating range (Note 4) | 0.3 to 7 m 0.984 to 22.966 ft | | | | |
| Beam pitch | 20 mm 0.787 in | | 40 mm 1.575 in | | 20 mm 0.787 in / 40 mm 1.575 in |
| Min. sensing object (Note 5) | ø25 mm ø0.984 in opaque object | | ø45 mm ø1.772 in opaque object | | ø25 mm ø0.984 in opaque object / ø45 mm ø1.772 in opaque object |
| Effective aperture angle | ±2.5° or less [for an operating range exceeding 3 m 9.843 ft (conforming to IEC 61496-2 / UL 61496-2)] | | | | |
| Supply voltage | 24 V DC ±10 % Ripple P-P 10 % or less | | | | |
| Control outputs (OSSD 1, OSSD 2) | PNP open-collector transistor / NPN open-collector transistor (switching method) | | | | |
| | <p><For PNP output></p> <ul style="list-style-type: none"> Maximum source current: 200 mA Applied voltage: Same as supply voltage (between the control output and +V) Residual voltage: 2.5 V or less (source current 200 mA, when using 20 m 65.617 ft length cable) Leakage current: 0.1 mA or less (Including power supply OFF condition) Maximum load capacity: 0.22 µF (No load to maximum output current) Load wiring resistance: 3 Ω or less <p><For NPN output></p> <ul style="list-style-type: none"> Maximum sink current: 200 mA Applied voltage: Same as supply voltage (between the control output and 0 V) Residual voltage: 2.5 V or less (sink current 200 mA, when using 20 m 65.617 ft length cable) Leakage current: 0.1 mA or less (Including power supply OFF condition) Maximum load capacity: 0.22 µF (No load to maximum output current) Load wiring resistance: 3 Ω or less | | | | |
| Operation mode | ON when all beam channels are received, OFF when one or more beam channels are interrupted (OFF also in case of any malfunction in the light curtain or the synchronization signal) (Note 6, 7) | | | | |
| Protection circuit | Incorporated | | | | |
| Response time | OFF response: 14 ms or less, ON response: 80 to 90 ms | | | | |
| Auxiliary output (Non-safety output) | PNP open-collector transistor / NPN open-collector transistor (switching method) | | | | |
| | <p><For PNP output></p> <ul style="list-style-type: none"> Maximum source current: 60 mA Applied voltage: Same as supply voltage (between the auxiliary output and +V) Residual voltage: 2.5 V or less (source current 60 mA, when using 20 m 65.617 ft length cable) <p><For NPN output></p> <ul style="list-style-type: none"> Maximum sink current: 60 mA Applied voltage: Same as supply voltage (between the auxiliary output and 0 V) Residual voltage: 2.5 V or less (sink current 60 mA, when using 20 m 65.617 ft length cable) | | | | |
| Operation mode | OFF when control outputs are ON, ON when control outputs are OFF (Factory setting, operating mode can be changed using the SFB-HC handy-controller.) | | | | |
| Protection circuit | Incorporated | | | | |
| Muting auxiliary output | NPN open-collector transistor | | | | |
| | <ul style="list-style-type: none"> Maximum sink current: 100 mA Applied voltage: Same as supply voltage (between the muting auxiliary output and 0 V) Residual voltage: 2.5 V or less (sink current 100 mA, when using 20 m 65.617 ft length cable) | | | | |
| Operation mode | When muting auxiliary output: ON | | | | |
| Protection circuit | Incorporated | | | | |
| ELCA function | Incorporated (reducing mutual interference automatically) | | | | |
| Emission halt function | Incorporated | | | | |
| Interlock function | Incorporated [Manual reset / Auto reset (Note 8)] | | | | |
| External device monitoring function | Incorporated | | | | |
| Override function | Incorporated | | | | |
| Muting function | Incorporated | | | | |
| Large multi-purpose indicator function | Incorporated | | | | |
| Optional functions | Muting setting changing, override setting changing, fixed blanking, floating blanking, light emitting amount control, auxiliary output switching, protecting, interlock setting changing, external relay monitor setting changing | | Fixed blanking, floating blanking, light emitting amount control, auxiliary output switching, protecting, interlock setting changing, external relay monitor setting changing | | |
| Pollution degree | 3 | | | | |
| Operating altitude | 2,000 m 6.561.68 ft or less (Note 10) | | | | |
| Environmental resistance | Degree of protection | IP65 (IEC) | | | |
| | Ambient temperature | -10 to +55 °C +14 to +131 °F (No dew condensation or icing allowed), Storage: -25 to +60 °C -3 to +140 °F | | | |
| | Ambient humidity | 30 to 85 % RH, Storage: 30 to 85 % RH | | | |
| | Ambient illuminance | Incandescent light: 3,500 lx or less at the light-receiving face | | | |
| | Dielectric strength voltage / Insulation resistance | 1,000 V AC for one min. between all supply terminals connected together and enclosure / 20 MΩ or more, with 500 V DC megger between all supply terminals connected together and enclosure | | | |
| | Vibration resistance / Shock resistance | 10 to 55 Hz frequency, 0.75 mm 0.030 in amplitude in X, Y and Z directions for two hours each / 300 m/s ² acceleration (30 G approx.) in X, Y and Z directions for three times each | | | |

- Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C **+68 °F**.
2) Regarding EU Machinery Directive, a Notified Body, TÜV SÜD, has certified with the type examination certificate.
3) The product has been safety-certified in accordance with UL, ANSI, CSA, and other standards by TÜV SÜD, a nationally recognized safety laboratory (NRTL) that has been approved by the Occupational Safety and Health Administration (OSHA) as defined by 29 CFR 1910.7
4) The operating range is the possible setting distance between the emitter and the receiver.
5) In case the blanking function is valid, the operation mode is changed. For details, refer to "Safety distance" (p.22)
6) During muting, control output will not turn off even if the beams are interrupted.
7) When the blanking function is enabled, the operating mode will change.
8) The manual reset and automatic reset are possible to be switched depending on the wiring status.
9) In case of using optional function, the handy-controller **SFB-HC** is required.
10) Do not use or store the device in an environment where the air pressure is higher than the atmospheric pressure at an altitude of 0 meters.

SPECIFICATIONS

Light curtain common specifications

| Item | Model No. | Pigtailed type (with muting function) | | Cable type | |
|------------------|-----------|---|--|--|--|
| | | Min. sensing object ø25 mm ø0.984 in (20 mm 0.787 in beam pitch) | Min. sensing object ø45 mm ø1.772 in (40 mm 1.575 in beam pitch) | Min. sensing object ø25 mm ø0.984 in (20 mm 0.787 in beam pitch) | Min. sensing object ø45 mm ø1.772 in (40 mm 1.575 in beam pitch) |
| Emitting element | | Infrared LED (Peak emission wavelength: 850 nm 0.033 mil) | | | |
| Material | | Enclosure: Polycarbonate | | | |
| Cable | | 0.15 mm ² (power line: 0.2 mm ²) 12-core heat-resistant PVC cable with connector, 0.5 m 1.640 ft long | | 0.15 mm ² (power line: 0.2 mm ²) 8-core heat-resistant PVC cable, 5 m 16.404 ft long | |
| Cable extension | | Extension up to total 50 m 164.042 ft is possible for both emitter and receiver optional mating cables | | Extension up to total 50 m 164.042 ft is possible for 0.2 mm ² or more, cable (Note 11) | |
| Accessories | | SF4B-TR25 (Test rod): 1 pc. | _____ | SF4B-TR25 (Test rod): 1 pc. | _____ |


Note 11: When the synchronization + wire (orange) and synchronization - wire (orange / black) is extended with a cable other than exclusive cable, use a 0.2 mm² or more shielded twisted pair cable.

Control units

| Item | Model No. | SF-C13 |
|---|-----------|---|
| Connectable light curtains | | Light curtains manufactured by Panasonic Industrial Devices SUNX |
| Applicable standards | | EN 61496-1 (Type 4), EN 55011, EN ISO 13849-1 (Category 4, PL _e), IEC 61496-1 (Type 4), ISO 13849-1 (Category 4, PL _e), JIS B 9704-1 (Type 4), JIS B 9705-1 (Category 4), ANSI/UL 61496-1 (Type 4), UL 1998 (Class 2) |
| Control category | | ISO 13849-1 (EN ISO 13849-1, JIS B 9705-1) compliance up to Category 4, PL _e standards |
| Supply voltage | | 24 V DC ±10 % Ripple P-P 10 % or less |
| Current consumption | | 100 mA or less (excluding light curtain) |
| Fuse (rating) | | Built-in electronic fuse, Triggering current: 0.5 A or more, Reset after power down |
| Enabling path | | NO contact × 3 (13-14, 23-24, 33-34) |
| Utilization category | | AC-15, DC-13 (IEC 60947-5-1) |
| Rated operation voltage (U _e) / Rated operation current (I _e) | | 30 V DC / 4 A, 230 V AC / 4 A, resistive load (For inductive load, during contact protection) Min. applicable load: 10 mA (at 24 V DC) (Note 2) |
| Contact resistance | | 100 mΩ or less (initial value) |
| Contact protection fuse rating | | 4 A (slow blow) |
| Pick-up delay (Auto reset / Manual reset) | | 80 ms or less / 90 ms or less |
| Response time | | 10 ms or less |
| Auxiliary output | | Safety relay contact (NC contact) × 1 (41-42) (Related to enabling path) |
| Rated operation voltage / current | | 24 V DC / 2 A, Min. applicable load: 10 mA (at 24 V DC) |
| Contact protection fuse rating | | 2 A (slow blow) |
| Semiconductor auxiliary output (AUX) | | PNP open-collector transistor • Maximum source current: 60 mA |
| Output operation | | ON when the light curtain is interrupted |
| Excess voltage category | | II |
| Polarity selection function | | Incorporated (Cable connection allows selection of plus / minus ground) Minus ground: Correspond to PNP output light curtain Plus ground: Correspond to NPN output light curtain |
| Pollution degree | | 2 |
| Protection | | Enclosure: IP40, Terminal: IP20 |
| Ambient temperature | | -10 to +55 °C +14 to +131 °F (No dew condensation or icing allowed), Storage: -25 to +70 °C -13 to +158 °F |
| Ambient humidity | | 30 to 85 % RH, Storage: 30 to 90 % RH |
| Vibration resistance | | Resistance / malfunction 10 to 55 Hz frequency, 0.35 mm 0.014 in amplitude in X, Y, and Z directions for twenty times each |
| Enclosure material | | ABS |
| Weight | | Net weight: 200 g approx. |

- Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C **+68 °F**.
 2) If several **SF-C13** units are being used in line together, leave a space of 5 mm **0.197 in** or more between each unit.
 If the units are touching each other, reduce the rated operating current for safety output in accordance with the ambient operating temperature as shown in the graphs at right.
 3) Refer to our website for details of specifications.

Dilating when SF-C13 units are mounted close together



SPECIFICATIONS

Handy-controller

| Item | Model No. | SFB-HC |
|--------------------------|-----------|--|
| Supply voltage | | 24 V DC $\pm 10\%$ Ripple P-P10 % or less (common to light curtain power supply) |
| Current consumption | | 65 mA or less |
| Communication method | | RS-485 two-way communications (Specific procedure) |
| Digital display | | 4-digit red LED display $\times 2$ (Selected beam channels, setting contents etc. are displayed.) |
| Function indicator | | Green LED $\times 9$ (set function is displayed.) |
| Functions | | Fixed blanking (Factory setting: Disabled) / Floating blanking (Factory setting: Disabled) / Auxiliary output changing (Factory setting: Negative Logic of OSSD) / Light emitting amount control (Factory setting: Disabled) / Muting setting changing [Factory setting: All beam channels enabled, A = B, Setting of the muting lamp diagnosis function enabled (Ver. 2 or later), Muting sensor output operation setting N.O. / N.O. (Ver. 2.1 or later)] / Interlock setting changing (Factory setting: start / restart) / External device monitoring setting change (Factory setting: Enabled, 300 ms) / Override setting changing 60 sec. (Ver. 2.1 or later) / Setting detail monitoring / / Protecting (Factory setting: Disabled) (Factory password setting: 0000) / Initialization / Copy |
| Ambient temperature | | -10 to +55 °C +14 to +131 °F (No dew condensation or icing allowed), Storage: -25 to +70 °C -13 to +158 °F |
| Ambient humidity | | 30 to 85 % RH, Storage: 30 to 85 % RH |
| Voltage withstandability | | 1,000 V AC for one min. between all supply terminals connected together and enclosure |
| Insulation resistance | | 20 M Ω , or more, with 500 V DC megger between all supply terminals connected together and enclosure |
| Cable | | 8-core shielded cable, 0.5 m 1.640 ft long, with a connector at the end (2 cables) |
| Weight | | Net weight: 200 g approx. |
| Accessories | | Adapter cable: 2 cables |


Note: Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20 °C **+68 °F**.

SF4B-□CA-J05

Pigtailed type (with muting function)

I/O circuit diagrams


<In case of using I/O circuit for PNP output>

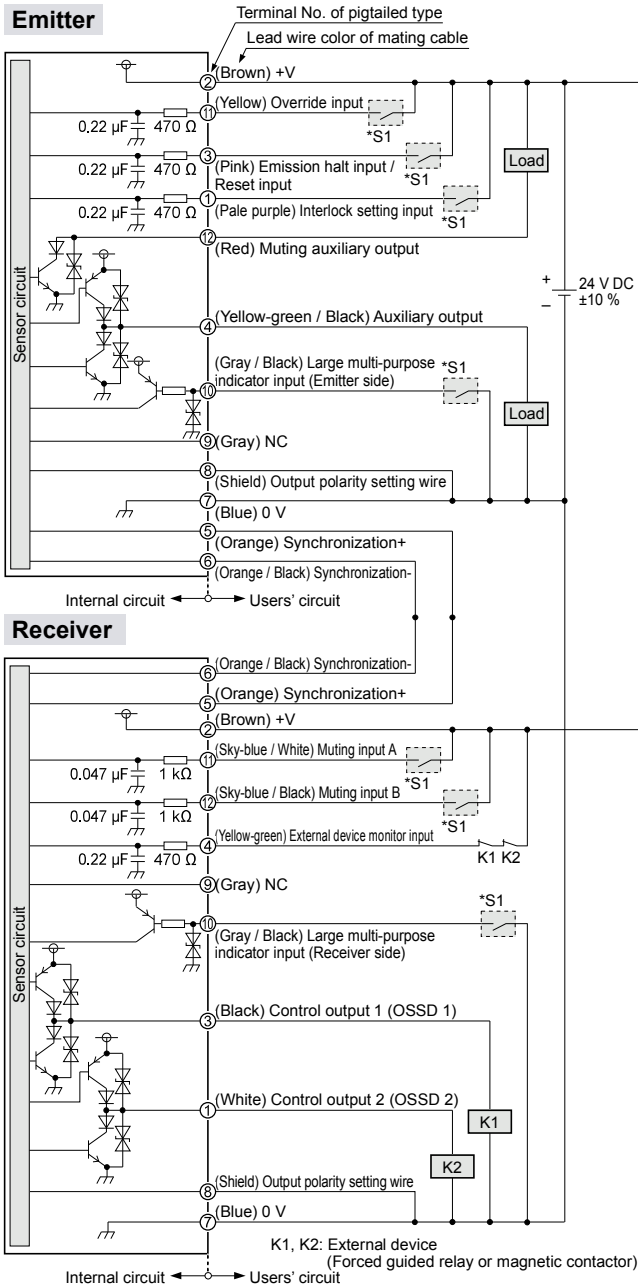

- *S1
- Switch S1
- Emission halt input / Reset input
For manual reset
Vs to Vs - 2.5 V (sink current 5 mA or less): Emission halt (Note)
Open: Emission
For automatic reset
Vs to Vs - 2.5 V (sink current 5 mA or less): Emission (Note)
Open: Emission halt
 - Interlock setting input, Override input, Muting input A / B, External device monitor input
Vs to Vs - 2.5 V (sink current 5 mA or less): Valid (Note)
Open: Invalid
 - Large multi-purpose indicator input
0 to +1.5 V (source current 5 mA or less): Lights up, Open: Turns OFF

Note: Vs is the applying supply voltage.

<In case of using I/O circuit for NPN output>

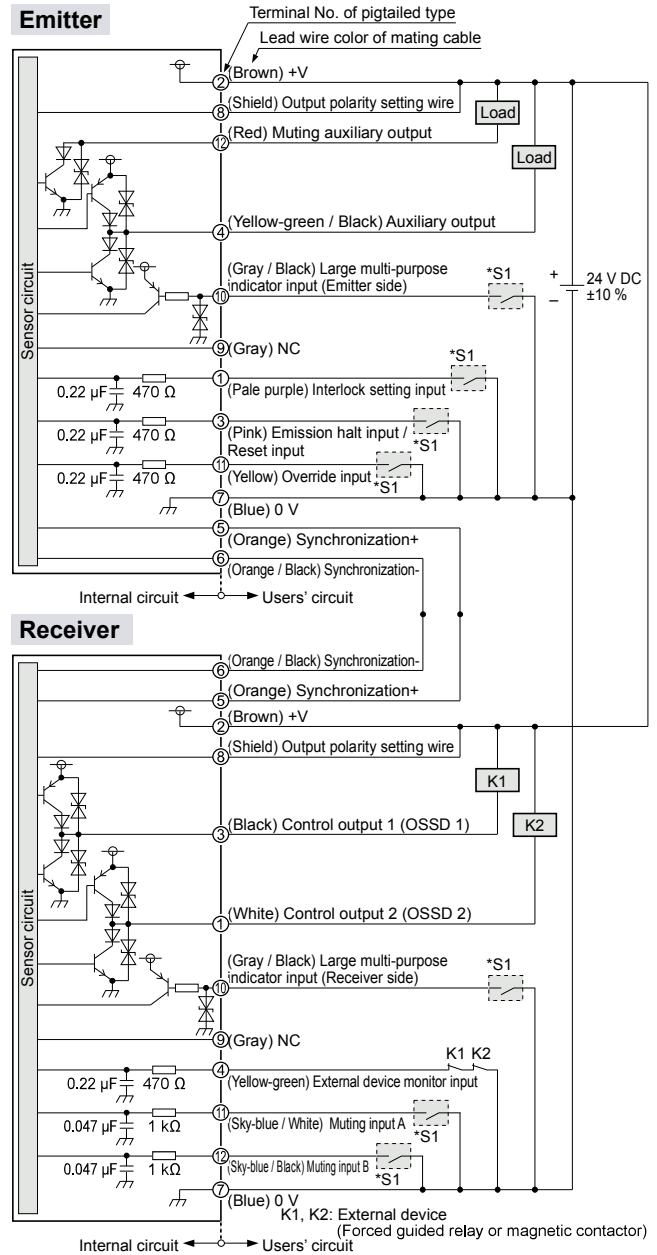

- *S1
- Switch S1
- Emission halt input / Reset input
For manual reset
0 to +1.5 V (source current 5 mA or less): Emission halt
Open: Emission
For automatic reset
0 to +1.5 V (source current 5 mA or less): Emission
Open: Emission halt
 - Interlock setting input, Override input, Muting input A / B, External device monitor input
0 to +1.5 V (source current: 5 mA or less): Valid, Open: Invalid
 - Large multi-purpose indicator input
0 to +1.5 V (source current 5 mA or less): Lights up, Open: Turns OFF

I/O CIRCUIT AND WIRING DIAGRAMS


SF4B-□CA-J05

Pigtailed type (with muting function)

Connection examples

Muting control components: Interlock function “disabled (automatic reset)”, external device monitoring function “enabled”

<In case of using I/O circuit for PNP output>

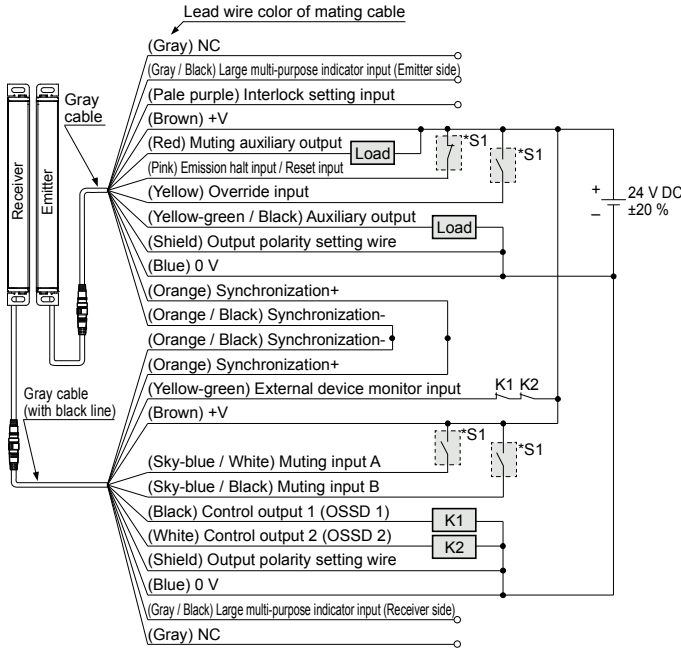


*S1
K1, K2: External device (Forced guided relay or magnetic contactor)

Switch S1

- Emission halt input / Reset input
For automatic reset Vs to Vs - 2.5 V (sink current 5 mA or less): Emission (Note)
Open: Emission halt
For manual reset Vs to Vs - 2.5 V (sink current 5 mA or less): Emission halt (Note)
Open: Emission
- Muting input A / B, Override input
Vs to Vs - 2.5 V (sink current 5 mA or less): Valid (Note), Open: Invalid

Note: Vs is the applying supply voltage.

<In case of using I/O circuit for NPN output>

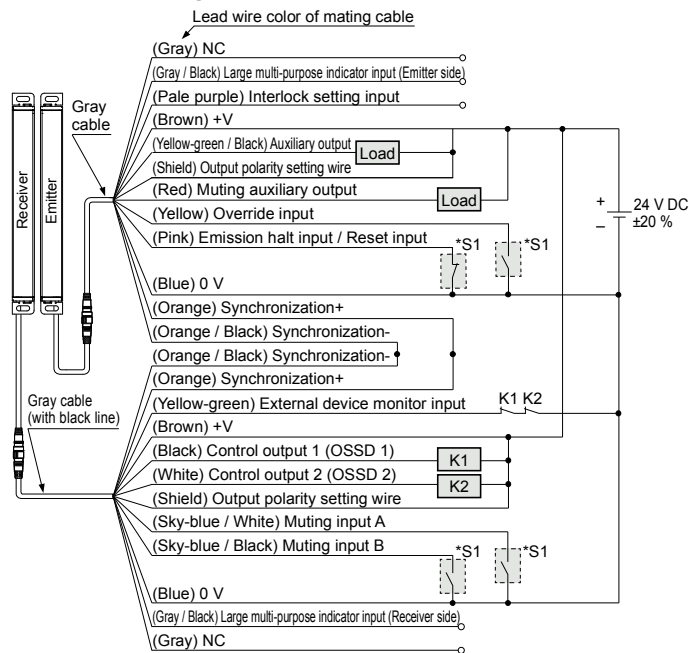

*S1
K1, K2: External device (Forced guided relay or magnetic contactor)


Switch S1

- Emission halt input / Reset input
For automatic reset 0 to +1.5 V (source current 5 mA or less): Emission, Open: Emission halt
For manual reset 0 to +1.5 V (source current 5 mA or less): Emission halt, Open: Emission
- Muting input A / B, Override input
0 to + 1.5 V (source current 5 mA or less): Valid, Open: Invalid


The diagram at left shows the configuration when using PNP output, interlock function “disabled (automatic reset)” and external device monitoring function “enabled”.

In case of setting the interlock function to “enabled (manual reset)”

- When the interlock function is set to “Enable (manual reset),” the override function cannot be used.

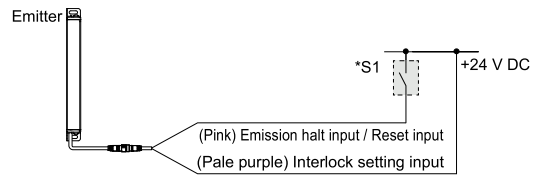


In case of setting the external device monitoring function to “disabled”

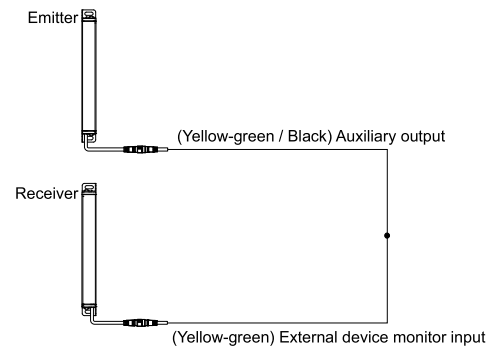


The diagram at left shows the configuration when using NPN output, interlock function “disabled (automatic reset)” and external device monitoring function “enabled”.

In case of setting the interlock function to “enabled (manual reset)”

- When the interlock function is set to “Enable (manual reset),” the override function cannot be used.

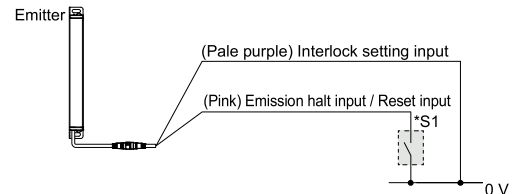


In case of setting the external device monitoring function to “disabled”

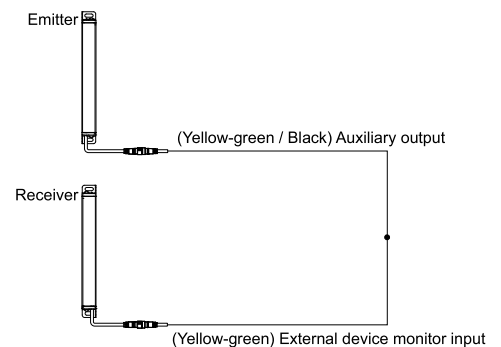


I/O circuit diagrams

<In case of using I/O circuit for PNP output>

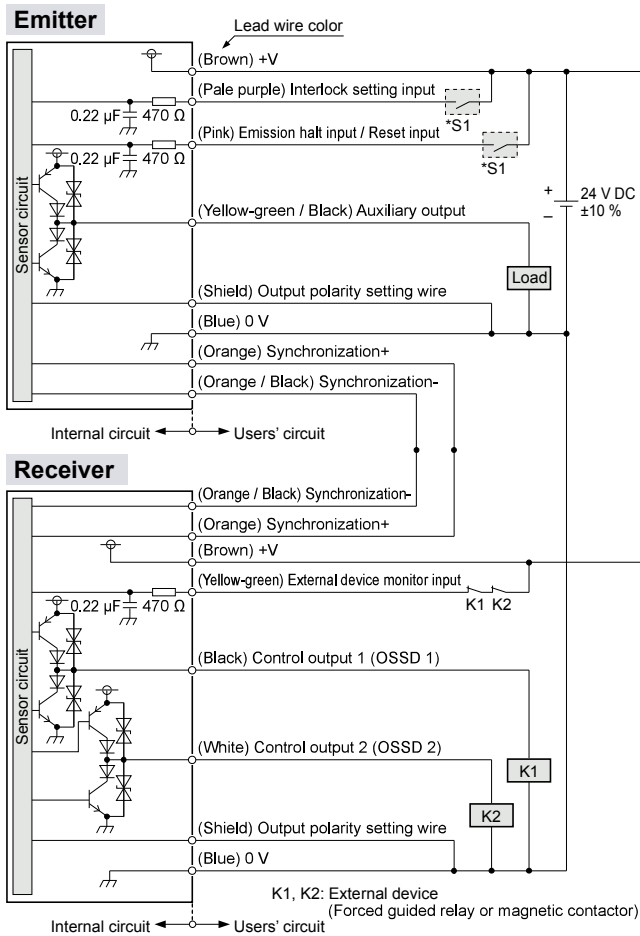

<In case of using I/O circuit for NPN output>

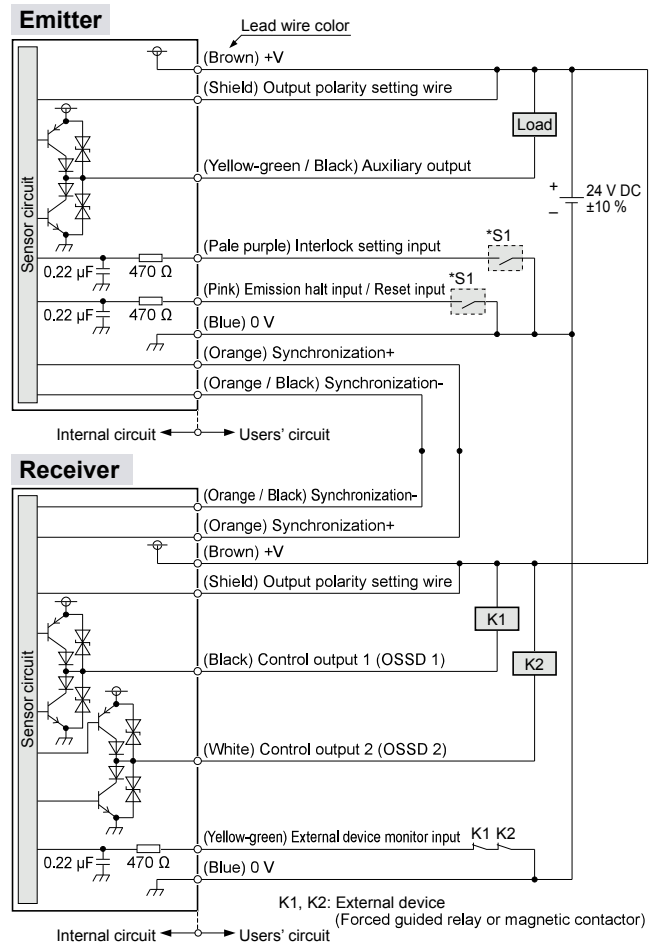

*S1
Switch S1
 • Emission halt input / Reset input
 For manual reset
 Vs to Vs - 2.5 V (sink current 5 mA or less): Emission halt (Note)
 Open: Emission
 For automatic reset
 Vs to Vs - 2.5 V (sink current 5 mA or less): Emission (Note)
 Open: Emission halt
 • Interlock setting input
 Vs to Vs - 2.5 V (sink current 5 mA or less): Valid (Note)
 Open: Invalid

*S1
Switch S1
 • Emission halt input / Reset input
 For manual reset
 0 to +1.5 V (source current 5 mA or less): Emission halt
 Open: Emission
 For automatic reset
 0 to +1.5 V (source current 5 mA or less): Emission
 Open: Emission halt
 • Interlock setting input
 0 to +1.5 V (source current 5 mA or less): Valid, Open: Invalid

Note: Vs is the applying supply voltage.

I/O CIRCUIT AND WIRING DIAGRAMS


SF4B-C

Cable type

Connection examples


Interlock function “enabled (manual reset)”, external device monitoring function “enabled”

<In case of using I/O circuit for PNP output>

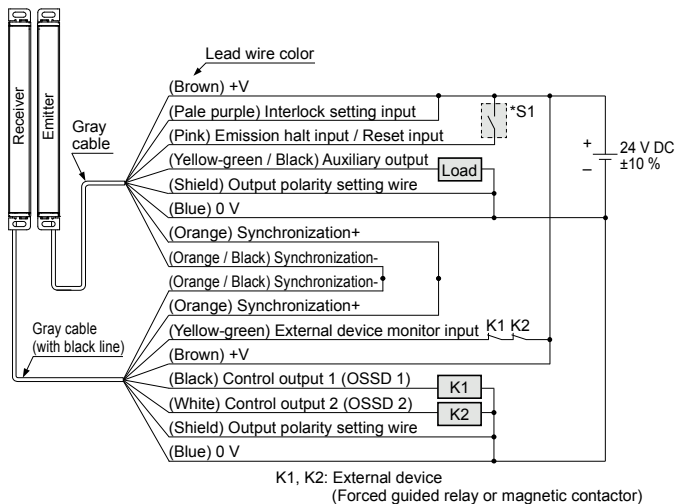


The diagram at left shows the configuration when using PNP output, interlock function “enabled (manual reset)” and external device monitoring function “enabled”.

In case of setting the interlock function to “disabled (automatic reset)”

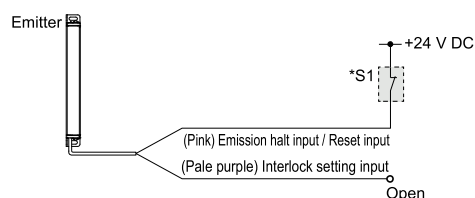

In case of setting the external device monitoring function to “disabled”

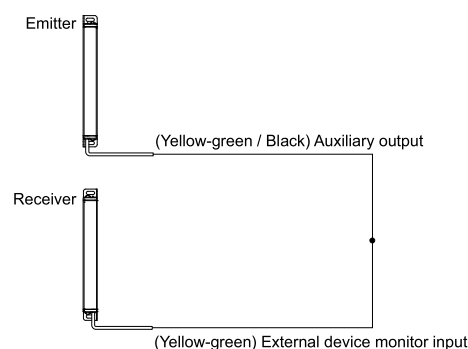


*S1

Switch S1

- Emission halt input / Reset input
 - For manual reset
 - Vs to Vs – 2.5 V (sink current 5 mA or less): Emission halt (Note)
 - Open: Emission
 - For automatic reset
 - Vs to Vs – 2.5 V (sink current 5 mA or less): Emission (Note)
 - Open: Emission halt
- Interlock setting input
 - Vs to Vs – 2.5 V (sink current 5 mA or less): Valid (Note)
 - Open: Invalid


Note: Vs is the applying supply voltage.

<In case of using I/O circuit for NPN output>

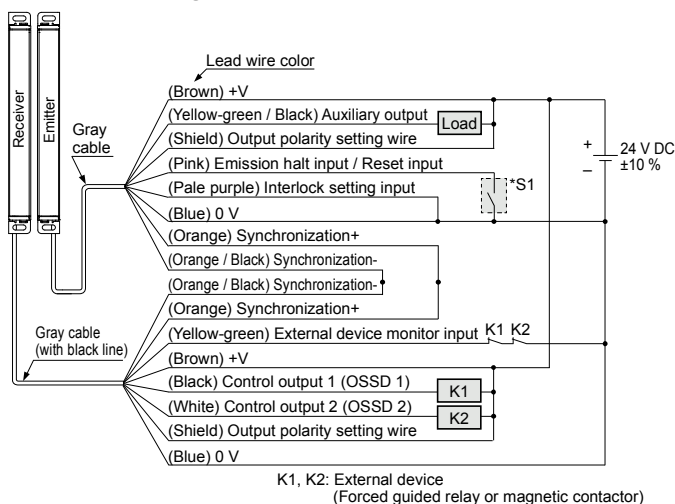


The diagram at left shows the configuration when using NPN output, interlock function “enabled (manual reset)” and external device monitoring function “enabled”.

In case of setting the interlock function to “disabled (automatic reset)”

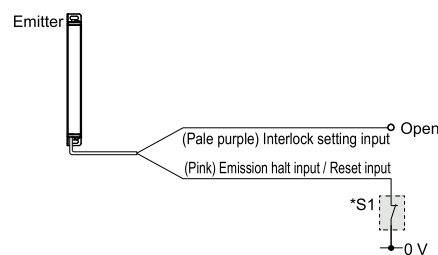

In case of setting the external device monitoring function to “disabled”

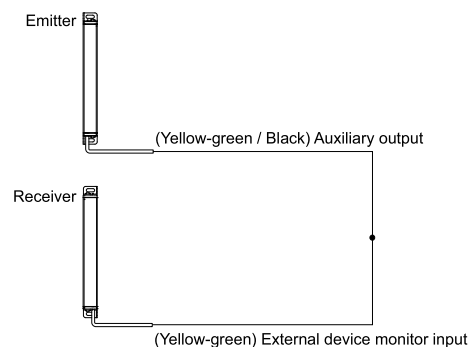

*S1

Switch S1

- Emission halt input / Reset input
 - For manual reset
 - 0 to +1.5 V (source current 5 mA or less): Emission halt
 - Open: Emission
 - For automatic reset
 - 0 to +1.5 V (source current 5 mA or less): Emission
 - Open: Emission halt
- Interlock setting input
 - 0 to +1.5 V (source current 5 mA or less): Valid, Open: Invalid


I/O CIRCUIT AND WIRING DIAGRAMS

SF-C13

SF4B-C wiring diagrams (Control Category 4)

For PNP output (minus ground)

- Connect the light curtain control outputs OSSD 1 and OSSD 2 to S1 and S2 respectively.

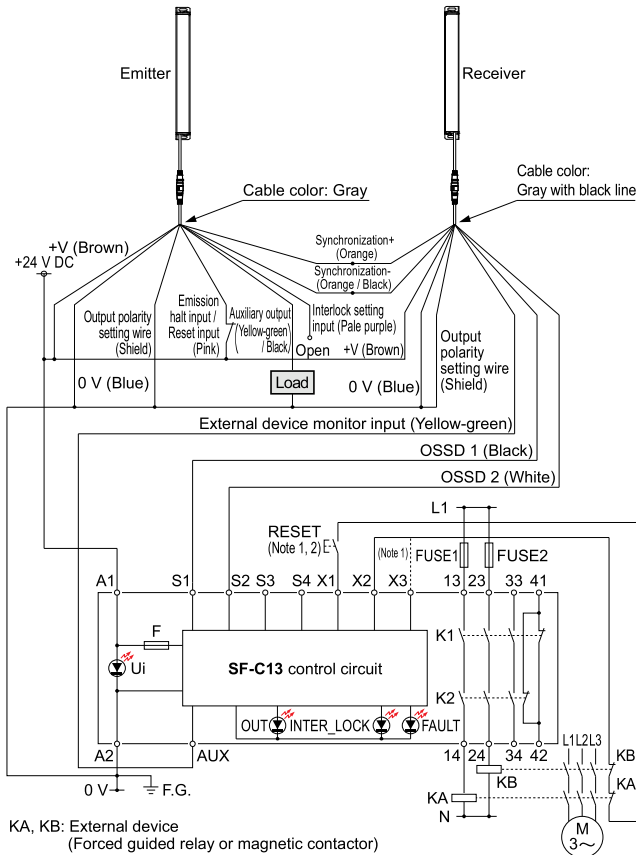


KA, KB: External device (Forced guided relay or magnetic contactor)

- Notes: 1) The above diagram is when using manual reset. If automatic reset is used, disconnect the lead from X2 and connect it to X3. In this case, a reset (RESET) button is not needed.
2) Use a momentary-type switch as the reset (RESET) button.

For NPN output (plus ground)

- Connect the light curtain control outputs OSSD 1 and OSSD 2 to S4 and S2 respectively and ground the + side.

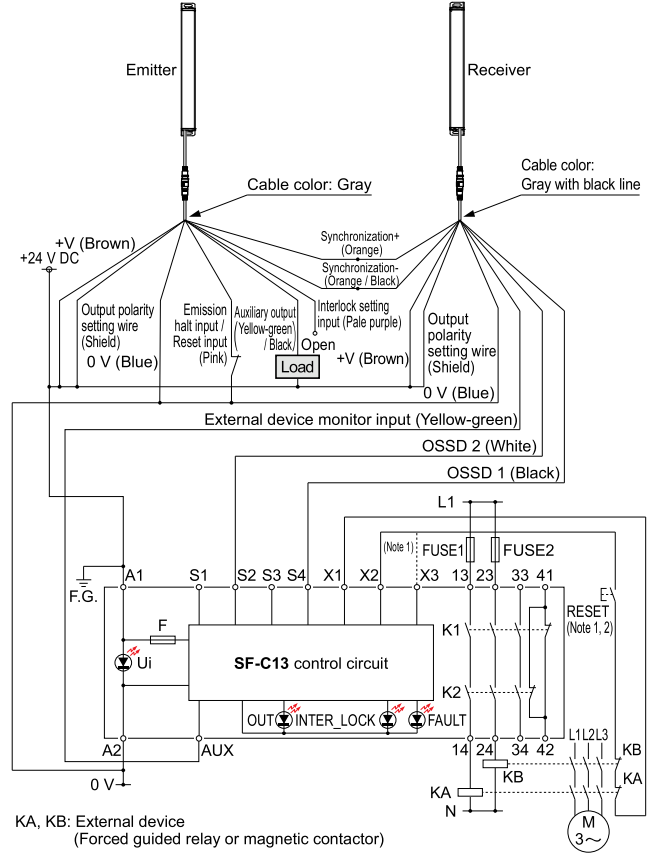

KA, KB: External device (Forced guided relay or magnetic contactor)

- Notes: 1) The above diagram is when using manual reset. If automatic reset is used, disconnect the lead from X2 and connect it to X3. In this case, a reset (RESET) button is not needed.
2) Use a momentary-type switch as the reset (RESET) button.

Terminal arrangement diagram

| Terminal | Description |
|---------------------|--|
| A1 | +24 V DC |
| A2 | 0 V |
| S1 to S4 | Light curtain control output (OSSD) input terminal |
| AUX | Semiconductor auxiliary output |
| X1 | Reset output terminal |
| X2 | Reset input terminal (Manual) |
| X3 | Reset input terminal (Automatic) |
| 13-14, 23-24, 33-34 | Enabling path (NO contact × 3) |
| 41-42 | Auxiliary output (NC contact × 1) |

A terminal block is required for wiring of light curtain side.

PRECAUTIONS FOR PROPER USE

Refer to the instruction manual for details.
The instruction manual can be downloaded from our website.

Wiring



Refer to the applicable regulations for the region where this device is to be used when setting up the device. In addition, make sure that all necessary measures are taken to prevent possible dangerous operating errors resulting from earth faults.

- Make sure to carry out the wiring in the power supply off condition.
- Verify that the supply voltage variation is within the rating.
- If power is supplied from a commercial switching regulator, ensure that the frame ground (F.G.) terminal of the power supply is connected to an actual ground.
- In case noise generating equipment (switching regulator, inverter motor, etc.) is used in the vicinity of this sensor, connect the frame ground (F.G.) terminal of the equipment to an actual ground.
- Do not run the wires together with high-voltage lines or power lines or put them in the same raceway. This can cause malfunction due to induction.

Interlock function

- The selection of manual reset / automatic reset is available by applying the interlock input (pale purple) wiring. The interlock becomes available by selecting manual reset.

| Interlock setting input wire (pale purple) | Interlock function |
|---|--------------------|
| When selecting PNP output: Connected to +V When selecting NPN output: Connected to 0 V | Manual reset |
| Open | Automatic reset |



In case of using the interlock function, be sure there exists no operator inside of the dangerous area. It causes death or serious injury without the confirmation.

Manual reset


- The control outputs (OSSD 1, OSSD 2) are not turned ON automatically even though this device is received the light. When this device is reset in light received state [open the emission halt input / reset input → short-circuit the device to 0 V or +V → open], the control outputs (OSSD 1, OSSD 2) are turned ON.



The reset switch shall be placed in area where all over the dangerous zone shall be comprehend and out side of the dangerous zone.

Automatic reset

- The control outputs (OSSD 1, OSSD 2) are turned ON automatically when this device receives the light.



In case that this light curtain is used under automatic reset mode, set the system not to be auto reset by the safety relay unit, etc. (conforming to EN 60204-1)

- It is possible to change the conditions for interlocking by using the handy-controller **SFB-HC** (optional). Refer to instruction manual enclosed with this product for details.

Emission halt function

- This function stops the emission process of the emitter. You can select whether emission is on or halted by means of the connection status for the emission halt input / reset input wire (pink).

| Interlock function | Emission halt input / Reset input wire (pink) | Emission halt input | Control output status (OSSD 1, OSSD 2) |
|--------------------|---|---------------------|--|
| Manual reset | Open | Invalid | ON |
| | When selecting PNP output: Connected to +V When selecting NPN output: Connected to 0 V | Valid | OFF |
| Automatic reset | Open | Valid | OFF |
| | When selecting PNP output: Connected to +V When selecting NPN output: Connected to 0 V | Invalid | ON |

- During emission halt, the control outputs (OSSD 1, OSSD 2) become OFF status.
- By using this function, malfunction due to extraneous noise or abnormality in the control outputs (OSSD 1, OSSD 2) and the auxiliary output can be determined even from the machinery side.
- Normal operation is restored when the emission halt input / reset input wire (pink) is connected to 0 V or +V (for manual reset: open).



Do not use the emission halt function for the purpose of stopping the machine in which the **SF4B-C** series is installed. Failure to do so could result in death or serious injury.

External device monitoring function


- This is the function for checking whether the external safety relay connected to the control outputs (OSSD 1, OSSD 2) perform normally in accordance with the control outputs (OSSD 1, OSSD 2) or not. Monitor the contacting point "b" of the external safety relay, and if any abnormality such as deposit of the contacting point, etc. is detected, change the status of the light curtain into lockout one, and turn OFF the control outputs (OSSD 1, OSSD 2).

In case of setting the external device monitoring function to enabled

- Connect the external device monitoring input (yellow-green) to the external safety relay connected the control outputs (OSSD 1, OSSD 2).

In case of not using the external device monitoring function

- Connect the external device monitoring input (yellow-green) to the auxiliary output (yellow-green / black). At this time, set the auxiliary output as [negative logic of control outputs (OSSD 1, OSSD 2)] (factory setting).
- The auxiliary output cannot be connected to external devices.

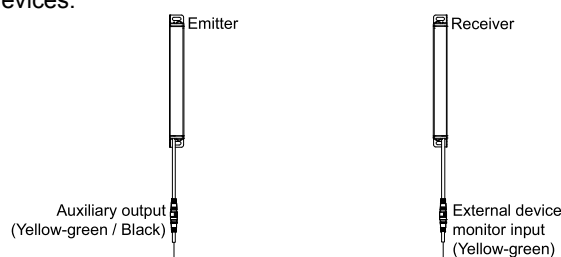

- It is also possible to set the external device monitoring function into invalid by using the handy-controller **SFB-HC** (optional). Refer to instruction manual enclosed with this product for details.


PRECAUTIONS FOR PROPER USE

Refer to the instruction manual for details.
The instruction manual can be downloaded from our website.

Auxiliary output (Non-safety output)


- This light curtain incorporates the auxiliary output (yellow-green / black) for the non-safety output. The auxiliary output is incorporated with the emitter.

| Auxiliary output setting | Normal mode | | | Lockout |
|--|---------------|---|------------------|---------|
| | Emission halt | Control outputs (OSSD 1, OSSD 2) status | | |
| | | Beam received | Beam interrupted | |
| Negative logic of OSSD (Factory setting) | ON | OFF | ON | ON |



Do not use the auxiliary output for the purpose of stopping the device with **SF4B-C** installed. Failure to do so could result in serious injury or death.

Muting Function (For SF4B-□CA-J05 only)




- Incorrect use of the muting control may cause accidents. Please understand the muting control fully, and use it. As for the muting control, the following international standards define the requirements.
ISO 13849-1 (EN ISO 13849-1 / JIS B 9705-1)
IEC 61496-1 (ANSI / UL 61496 / JIS B 9704-1)
IEC 60204-1 (JIS B 9960-1)
EN 415-4
ANSI B11.19-1990
ANSI/RIA R15.06-1999
- Use the muting control while the machine cycle is not in danger mode. Maintain safety with the other measure while the muting control is activated.
- For the application that the muting control is activated when a workpiece passes through the sensor, place the muting sensor so that the conditions for the muting control cannot be satisfied by intrusion of personnel when the workpiece is passing through the sensor or the workpiece is not passing through it.
- Be sure to check the operation of the muting function before its use.

- This function turns the safety function of this light curtain into disabled temporarily. When the control outputs (OSSD 1, OSSD 2) are ON, this function is available for passing the workpiece through the sensing area of the light curtain without stopping the machinery. The muting function becomes valid when all the conditions listed below are satisfied.
 - (1) The control outputs (OSSD 1, OSSD 2) shall be ON.
 - (2) The output of the muting sensors A and B shall be changed from OFF (open) to ON. At this time, the time difference occurred by changing the output of the muting sensors A and B into ON status shall be within 0.03 to 3 sec. (Note 1)
- The following devices, photoelectric sensor with semiconductor output, inductive proximity sensor, position switch on N.O. (Normally open) contact, etc. are available for applying to the muting sensor.

Notes: 1) 0 to 3 sec. is allowable by using the handy controller Ver. 2.1 (SFB-HC) (optional) and connecting N.O. (Normally Open) type muting sensor to the input A, as well as connecting N.C. (Normally Closed) type muting sensor to the input B.
2) The muting indicator diagnosis function can be set with the handy controller Ver. 2 or later (SFB-HC) (optional), but it must be set to invalid. If the muting indicator diagnosis function is set to valid, the muting function cannot be used.

<Muting auxiliary output wiring>

- To trigger a large multi-purpose indicator during muting operation, connect the wiring as follows: As for lead wires other than below, perform wiring depending on your application.

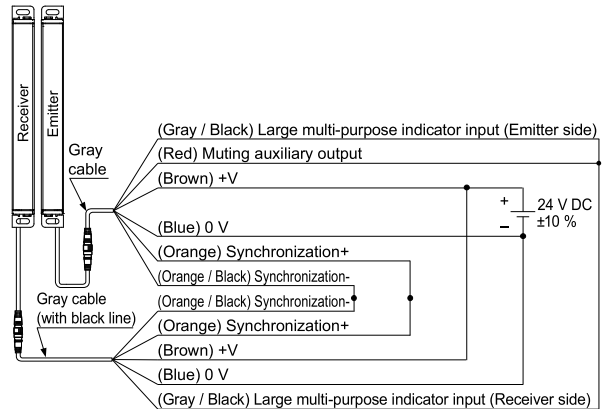


Override function (For SF4B-□CA-J05 only)

- This function sets the safety function of this light curtain enabled forcibly. When using the muting function, the override function can be used to start the machinery at times such as when the control outputs (OSSD 1 and OSSD 2) are OFF or when the muting sensors are ON when the line is to be started. The override function becomes valid when all the conditions listed below are satisfied.
 - (1) The signal shall be input to either muting sensor A, B, or A and B.
 - (2) The override input (yellow) shall be short-circuited to 0 V or +V, and the emission halt input / reset input (pink) shall be opened. (3 sec. continuously)

If one of the two conditions above becomes invalid or timing exceeds 60 sec. (Note 1), the override function becomes invalid.
- The override function only operates when the interlock function is disabled (automatic reset).

Notes: 1) By using handy-controller (SFB-HC) (optional) Ver.2.1 or later, a change between 60 and 600 sec. by 10 sec. per unit is possible.
2) The muting indicator diagnosis function can be set with the handy controller Ver. 2 or later (SFB-HC) (optional), but it must be set to invalid. If the muting indicator diagnosis function is set to valid, the muting function cannot be used.
3) The override function only operates when the interlock function is disabled (automatic reset).



- Make sure manually to operate system for starting override function. Furthermore, the system shall be placed in area where all over the dangerous zone shall be comprehend and out side of the dangerous zone.
- Using override function, make sure that there exist no operator in the dangerous zone, which may result in death or serious injury.

PRECAUTIONS FOR PROPER USE

Refer to the instruction manual for details.
The instruction manual can be downloaded from our website.

Others

- Do not use during the initial transient time (2 sec.) after the power supply is switched on.
- Avoid dust, dirt and steam.
- Take care that the light curtain does not come in direct contact with water, oil, grease, or organic solvents, such as, thinner, etc.
- Take care that the light curtain is not directly exposed to fluorescent light from a rapid-starter lamp or a high frequency lighting device, as it may affect the sensing performance.



- When this device is used in the "PSDI mode", an appropriate control circuit must be configured between this device and the machinery. For details, be sure to refer to the standards or regulations applicable in each region or country.
- To use this product in the U.S.A., refer to OSHA 1910.212 and OSHA 1910.217 for installation, and in Europe, refer to EN 999 as well. Observe your national and local requirements before installing this product.

- This catalog is a guide to select a suitable product. Be sure to read instruction manual attached to the product prior to its use.
- Both emitter and receiver are combined adjusted on factory setting, please apply both emitter and receiver with the same serial No. The serial No. is indicated on the plates of both emitter and receiver. (Indicated under model No.)


- Make sure to carry out the test run before regular operation.
- Do not use this product with machinery that cannot be stopped immediately during the operating cycle by means of an emergency stop system.

Sensing area




- Make sure to install this product such that any part of the human body must pass through its sensing area in order to reach the dangerous parts of the machinery. Furthermore, ensure that some part of the operator's body always remains in the sensing area when operation is done with the dangerous parts of the machine. If the human body is not detected, there is a danger of serious injury or death.
- Do not use any reflection type or recursive reflection type arrangement.
- Multiple receivers (emitters) cannot be connected to one emitter (receiver).

Example of correct installation

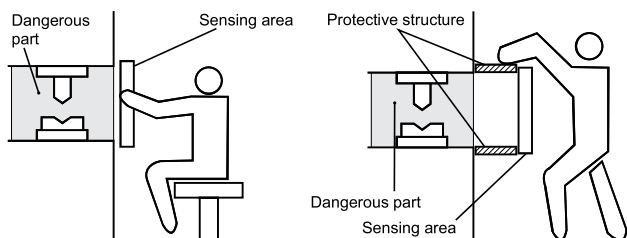

Example of incorrect installation

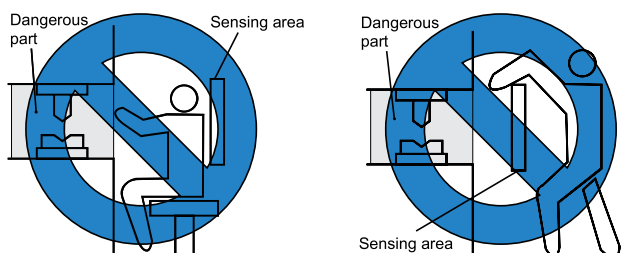


Influence of reflective surfaces




Install the light curtain by considering the effect of nearby reflective surfaces, and take countermeasures such as painting, masking, or changing the material of the reflective surface, etc. Failure to do so may cause the light curtain not to detect, resulting in serious body injury or death.

- Install this device at a distance of at least A (m) (given below) away from reflective surfaces such as metal walls, floors, ceilings, workpiece, covers, panels or glass surfaces.


Side view



Top view



| Distance between emitter and receiver (Setting distance L) | Allowable installation distance A |
|--|--|
| 0.3 to 3 m 0.984 to 9.843 ft | 0.16 m 0.525 ft |
| 3 to 7 m 9.843 to 22.966 ft | $L/2 \times \tan 2\theta =$ $L/2 \times 0.105$ (m) 0.344 (ft) ($\theta = 3^\circ$) |

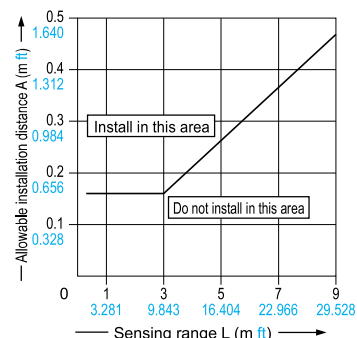

Note: The effective aperture angle for this device is $\pm 2.5^\circ$ or less (when $L > 3$ m 9.843 ft) as required by IEC 61496-2, ANSI/UL 61496-2. However, install this device away from reflective surfaces considering an effective aperture angle of $\pm 3^\circ$ to take care of beam misalignment, etc. during installation.

Handy-controller




This device enables to set each function using the handy-controller **SFB-HC** (optional). Among the functions, the contents related to the safety distance such as the size of the minimum sensing object and response time are varied depending on the setting condition. When setting each function, re-calculate the safety distance, and make enough space larger than the calculated safety distance. Failure to do so might cause the accident that the device cannot stop quickly before reaching the dangerous area of the machinery, resulting in the serious injury or death.

- Refer to the instruction manual enclosed with the handy-controller for details of the function settings for using handy-controller **SFB-HC** (optional).



PRECAUTIONS FOR PROPER USE

Refer to the instruction manual for details.
The instruction manual can be downloaded from our website.

Safety distance



- Calculate the safety distance correctly, and always maintain a distance which is equal to or greater than the safety distance, between the sensing area of this light curtain and the dangerous parts of the machinery. (Please check the latest standards for the equation.) If the safety distance is miscalculated or if sufficient distance is not maintained, there is a danger of serious injury or death.
- Before designing the system, refer to the relevant standards of the region where this device is to be used and then install this device.

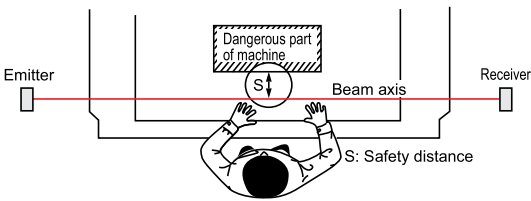The sizes of the minimum sensing objects for this device vary depending on whether or not the floating blanking function is being used. Calculate the safety distance with the proper size of the minimum sensing object and appropriate equation.

Size of minimum sensing object when applying floating blanking function

| | Invalid | Setting (Note) | | |
|--|---------------------|---------------------|----------------------|----------------------|
| | | 1 beam channel | 2 beam channels | 3 beam channels |
| SF4B-H□C (A-J05) (Min. sensing object ø25 mm ø0.984 in) | ø25 mm ø0.984 in | ø45 mm ø1.772 in | ø65 mm ø2.559 in | ø85 mm ø3.346 in |
| SF4B-H□C (A-J05) (Min. sensing object ø45 mm ø1.772 in) | ø45 mm ø1.772 in | ø85 mm ø3.346 in | ø125 mm ø4.921 in | ø165 mm ø6.496 in |

Note: Refer to p. 5 for details of the floating blanking function.

- Safety distance is calculated based on the following equation when a person moves perpendicular (normal intrusion) to the sensing area of the light curtain. In case the intrusion direction is not perpendicular to the sensing area, be sure to refer to the relevant standard (regional standard, specification of the machine, etc.) for details of the calculation.

For use in Europe (EU) (as EN 999) (Also applicable to ISO 13855 / JIS B 9715)

For intrusion direction perpendicular to the sensing area
<In the case that the minimum sensing object is ø40 mm ø1.575 in or less>

- Equation ① $S = K \times T + C$
 S: Safety distance (mm)
 Minimum required distance between the sensing area surface and the dangerous parts of the machine
 K: Intrusion velocity of operator's body or object (mm/sec.)
 Taken as 2,000 (mm/sec.) for calculation
 T: Response time of total equipment (sec.)
 $T = T_m + T_{SF4B}$
 T_m: Maximum halting time of machinery (sec.)
 T_{SF4B}: Response time of the **SF4B-C** series (sec.)
 C: Additional distance calculated from the size of the minimum sensing object of the **SF4B-C** series (mm)
 However, the value of "C" cannot be under 0.
 $C = 8 \times (d - 14)$
 d: Minimum sensing object diameter (mm)

- For calculating the safety distance "S", there are the following five cases.
 First calculate by substituting the value K = 2,000 (mm/sec.) in the equation above. Then, classify the obtained value of "S" into three cases, 1) S < 100, 2) 100 ≤ S ≤ 500, and 3) S > 500. For Case 3) S > 500, recalculate by substituting the value K = 1,600 (mm/sec.). After that, classify the calculation result into two cases, 4) S ≤ 500 and 5) S > 500. For details, refer to the instruction manual enclosed with this product.
- When this product is used in the "PSDI mode", an appropriate safety distance "S" must be calculated. For details, be sure to refer to the standards or regulations applicable in each region or country.

<In the case that the minimum sensing object is ø40 mm ø1.575 in or more>

- Equation ① $S = K \times T + C$
 S: Safety distance (mm)
 K: Intrusion velocity of operator's body or object (mm/sec.)
 Taken as 1,600 (mm/sec.) for calculation
 T: Response time of total equipment (sec.)
 $T = T_m + T_{SF4B}$
 T_m: Maximum halting time of machinery (sec.)
 T_{SF4B}: Response time of the **SF4B-C** series (sec.)
 C: Additional distance calculated from the size of the minimum sensing object of the **SF4B-C** series (mm)
 C = 850 (mm) (Constant)

For use in the United States of America (as per ANSI/RIA 15.06)

- Equation ② $S = K \times (T_s + T_c + T_{SF4B} + T_{bm}) + D_{pf}$
 S: Safety distance (mm)
 Minimum required distance between the sensing area surface and the dangerous parts of the machine
 K: Intrusion velocity {Recommended value in OSHA is 63 (inch/s) [≈ 1,600 (mm/sec.)]}
 ANSI/RIA 15.06 does not define the intrusion speed "K". When determining K, consider possible factors including physical ability of operators.
 T_s: Halting time calculated from the operation time of the control element (air valve, etc.) (sec.)
 T_c: Maximum response time of the control circuit required for functioning the brake (sec.)
 T_{SF4B}: Response time of the **SF4B-C** series (sec.)
 T_{bm}: Additional halting time tolerance for the brake monitor (sec.)
 The following equation holds when the machine is equipped with a brake monitor.
 $T_{bm} = T_a - (T_s + T_c)$
 T_a: Setting time of brake monitor (sec.)
 When the machine is not equipped with a brake monitor, it is recommended that 20 % or more of (T_s + T_c) is taken as additional halting time.
 D_{pf}: Additional distance calculated from the size of the minimum sensing object of the device (mm)
SF4B-H□C (A-J05): D_{pf} = 61.2 mm 2.409 in
SF4B-A□C (A-J05): D_{pf} = 129.2 mm 5.087 in
 $D_{pf} = 3.4 \times (d - 0.276)$ (inch)
 $\approx 3.4 \times (d - 7)$ (mm)
 d: Minimum sensing object diameter 0.985 (inch) ≈ 25 (mm) [**SF4B-H□C (A-J05)**]
 Minimum sensing object diameter 1.772 (inch) ≈ 45 (mm) [**SF4B-A□C (A-J05)**]
- When the floating blanking function is applied, the minimum sensing object becomes large. According to ANSI/RIA 15.06,
 D_{pf} = 900 mm (3 ft) when d > 64 mm (2.5 inches).


DIMENSIONS (Unit: mm in)

The CAD data in the dimensions can be downloaded from our website.


SF4B-□CA-J05 SF4B-□C
Light curtain

Assembly dimensions

The figure depicts rear mounting using the standard mounting bracket **MS-SF4BC-1** (optional) and the intermediate supporting bracket for standard mounting bracket **MS-SF4BC-5** (optional).

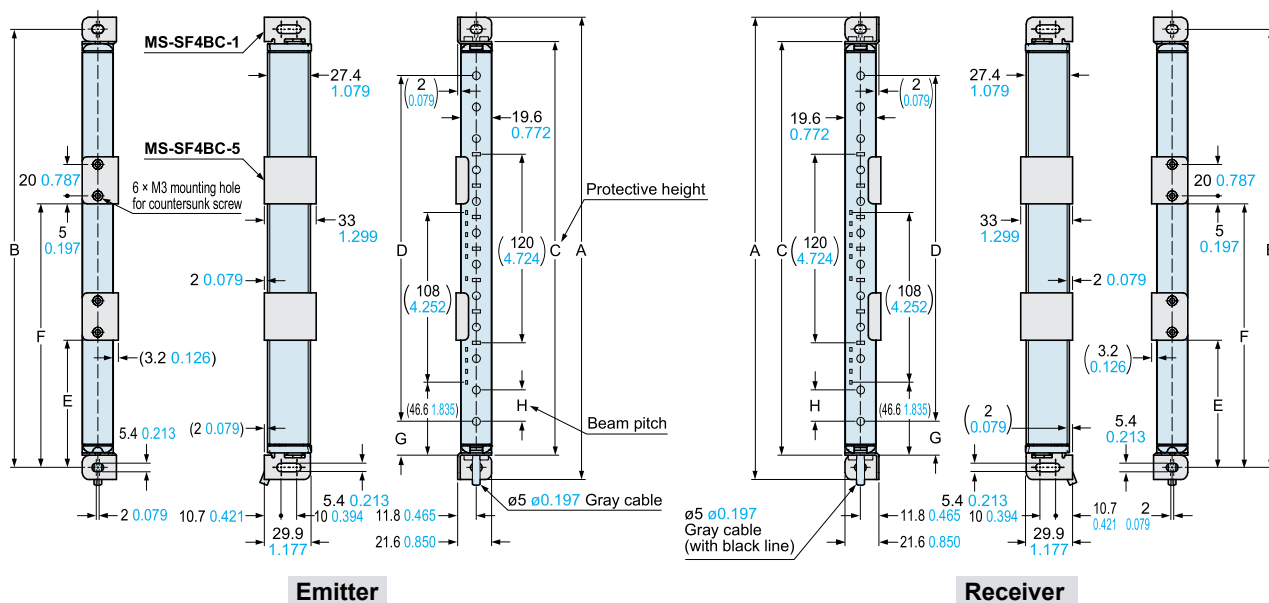

<Connector of the pigtailed type (with muting function) SF4B-□CA-J05>



| Model No. | A | B | C | D | | E | F |
|-------------------|-------------------|-----------------|-------------------|------------------|------------------|---------------|-----------------|
| | | | | SF4B-H□C (A-J05) | SF4B-A□C (A-J05) | | |
| SF4B-H12C (A-J05) | 294.4 11.591 | 279 10.984 | 263.4 10.370 | 220 8.661 | — | — | — |
| SF4B-H16C (A-J05) | 374.4 14.740 | 359 14.134 | 343.4 13.520 | 300 11.811 | 280 11.024 | — | — |
| SF4B-H20C (A-J05) | 454.4 17.890 | 439 17.283 | 423.4 16.669 | 380 14.961 | — | — | — |
| SF4B-H24C (A-J05) | 534.4 21.039 | 519 20.433 | 503.4 19.819 | 460 18.110 | 440 17.323 | — | — |
| SF4B-H28C (A-J05) | 614.4 24.189 | 599 23.583 | 583.4 22.969 | 540 21.260 | — | — | — |
| SF4B-H32C (A-J05) | 694.4 27.339 | 679 26.732 | 663.4 26.118 | 620 24.409 | 600 23.622 | — | — |
| SF4B-H36C (A-J05) | 774.4 30.488 | 759 29.882 | 743.4 29.268 | 700 27.559 | — | — | — |
| SF4B-H40C (A-J05) | 854.4 33.638 | 839 33.031 | 823.4 32.417 | 780 30.709 | 760 29.921 | 395 15.551 | — |
| SF4B-H48C (A-J05) | 1,014.4 39.937 | 999 39.331 | 983.4 38.717 | 940 37.008 | 920 36.220 | 475 18.701 | — |
| SF4B-H56C (A-J05) | 1,174.4 46.236 | 1,159 45.630 | 1,143.4 45.016 | 1,100 43.307 | 1,080 42.520 | 555 21.850 | — |
| SF4B-H64C (A-J05) | 1,334.4 52.535 | 1,319 51.929 | 1,303.4 51.315 | 1,260 49.606 | 1,240 48.819 | 415 16.339 | 854 33.622 |
| SF4B-H72C (A-J05) | 1,494.4 58.835 | 1,479 58.228 | 1,463.4 57.614 | 1,420 55.906 | 1,400 55.118 | 468 18.425 | 961 37.835 |
| SF4B-H80C (A-J05) | 1,654.4 65.134 | 1,639 64.528 | 1,623.4 63.913 | 1,580 62.205 | 1,560 61.417 | 521 20.512 | 1,068 42.047 |
| SF4B-H88C (A-J05) | 1,814.4 71.433 | 1,799 70.827 | 1,783.4 70.212 | 1,740 68.504 | 1,720 67.716 | 574 22.598 | 1,175 46.260 |
| SF4B-H96C (A-J05) | 1,974.4 77.732 | 1,959 77.126 | 1,943.4 76.512 | 1,900 74.803 | 1,880 74.016 | 627 24.685 | 1,282 50.472 |


| Model No. | G | H |
|------------------|---------------|-------------|
| SF4B-H□C (A-J05) | 21.7 0.854 | 20 0.787 |
| SF4B-A□C (A-J05) | 41.7 1.642 | 40 1.575 |

SF4B-□CA-J05 SF4B-□C


Light curtain

Assembly dimensions

The figure depicts side mounting using the standard mounting bracket **MS-SF4BC-1** (optional) and the intermediate supporting bracket for standard mounting bracket **MS-SF4BC-5** (optional).

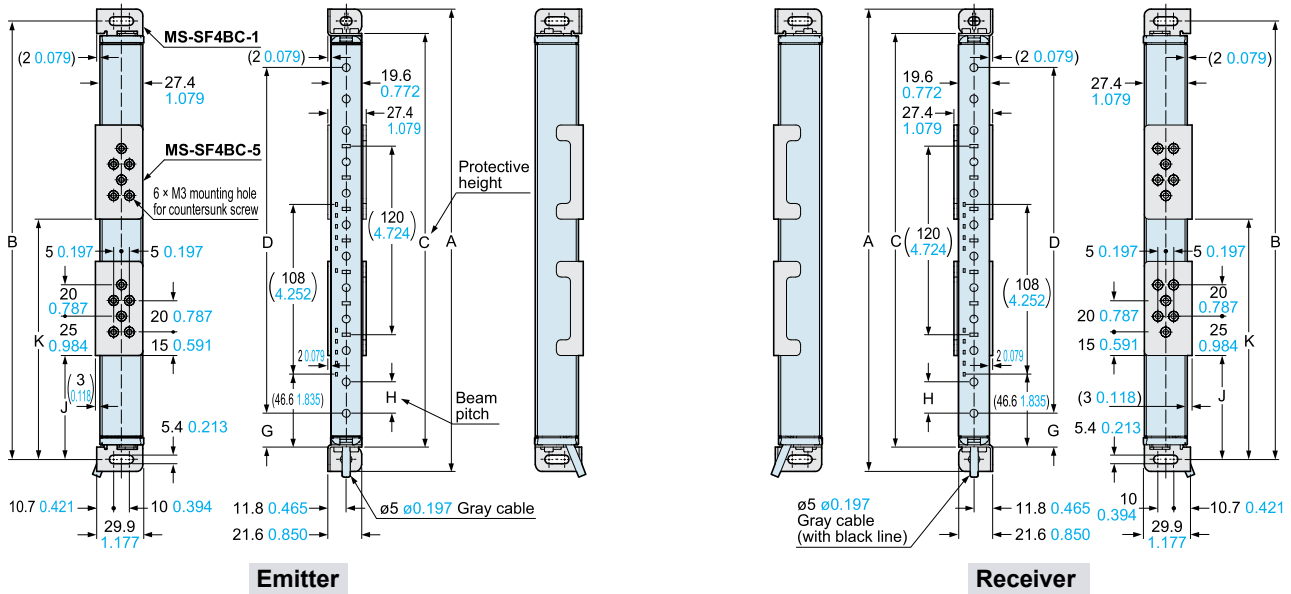

<Connector of the pigtailed type (with muting function) SF4B-□CA-J05>



| Model No. | A | B | C | D | | J | K |
|-------------------------------------|-------------------|-----------------|-------------------|------------------|------------------|---------------|-----------------|
| | | | | SF4B-H□C (A-J05) | SF4B-A□C (A-J05) | | |
| SF4B-H12C (A-J05) | 294.4 11.591 | 279 10.984 | 263.4 10.370 | 220 8.661 | — | — | — |
| SF4B-H16C (A-J05) SF4B-A8C (A-J05) | 374.4 14.740 | 359 14.134 | 343.4 13.520 | 300 11.811 | 280 11.024 | — | — |
| SF4B-H20C (A-J05) | 454.4 17.890 | 439 17.283 | 423.4 16.669 | 380 14.961 | — | — | — |
| SF4B-H24C (A-J05) SF4B-A12C (A-J05) | 534.4 21.039 | 519 20.433 | 503.4 19.819 | 460 18.110 | 440 17.323 | — | — |
| SF4B-H28C (A-J05) | 614.4 24.189 | 599 23.583 | 583.4 22.969 | 540 21.260 | — | — | — |
| SF4B-H32C (A-J05) SF4B-A16C (A-J05) | 694.4 27.339 | 679 26.732 | 663.4 26.118 | 620 24.409 | 600 23.622 | — | — |
| SF4B-H36C (A-J05) | 774.4 30.488 | 759 29.882 | 743.4 29.268 | 700 27.559 | — | — | — |
| SF4B-H40C (A-J05) SF4B-A20C (A-J05) | 854.4 33.638 | 839 33.031 | 823.4 32.417 | 780 30.709 | 760 29.921 | 390 15.354 | — |
| SF4B-H48C (A-J05) SF4B-A24C (A-J05) | 1,014.4 39.937 | 999 39.331 | 983.4 38.717 | 940 37.008 | 920 36.220 | 470 18.504 | — |
| SF4B-H56C (A-J05) SF4B-A28C (A-J05) | 1,174.4 46.236 | 1,159 45.630 | 1,143.4 45.016 | 1,100 43.307 | 1,080 42.520 | 550 21.654 | — |
| SF4B-H64C (A-J05) SF4B-A32C (A-J05) | 1,334.4 52.535 | 1,319 51.929 | 1,303.4 51.315 | 1,260 49.606 | 1,240 48.819 | 410 16.142 | 849 33.425 |
| SF4B-H72C (A-J05) SF4B-A36C (A-J05) | 1,494.4 58.835 | 1,479 58.228 | 1,463.4 57.614 | 1,420 55.906 | 1,400 55.118 | 463 18.228 | 956 37.638 |
| SF4B-H80C (A-J05) SF4B-A40C (A-J05) | 1,654.4 65.134 | 1,639 64.528 | 1,623.4 63.913 | 1,580 62.205 | 1,560 61.417 | 516 20.315 | 1,063 41.850 |
| SF4B-H88C (A-J05) SF4B-A44C (A-J05) | 1,814.4 71.433 | 1,799 70.827 | 1,783.4 70.212 | 1,740 68.504 | 1,720 67.716 | 569 22.402 | 1,170 46.063 |
| SF4B-H96C (A-J05) SF4B-A48C (A-J05) | 1,974.4 77.732 | 1,959 77.126 | 1,943.4 76.512 | 1,900 74.803 | 1,880 74.016 | 622 24.488 | 1,277 50.275 |

| Model No. | G | H |
|------------------|------------|----------|
| SF4B-H□C (A-J05) | 21.7 0.854 | 20 0.787 |
| SF4B-A□C (A-J05) | 41.7 1.642 | 40 1.575 |

DIMENSIONS (Unit: mm in)


The CAD data in the dimensions can be downloaded from our website.

SF4B-□CA-J05 SF4B-□C


Light curtain

Assembly dimensions

The figure depicts rear mounting using the rear utility mounting bracket **MS-SF4BC-2** (optional) and the intermediate supporting bracket for utility mounting bracket **MS-SF4BC-4** (optional).

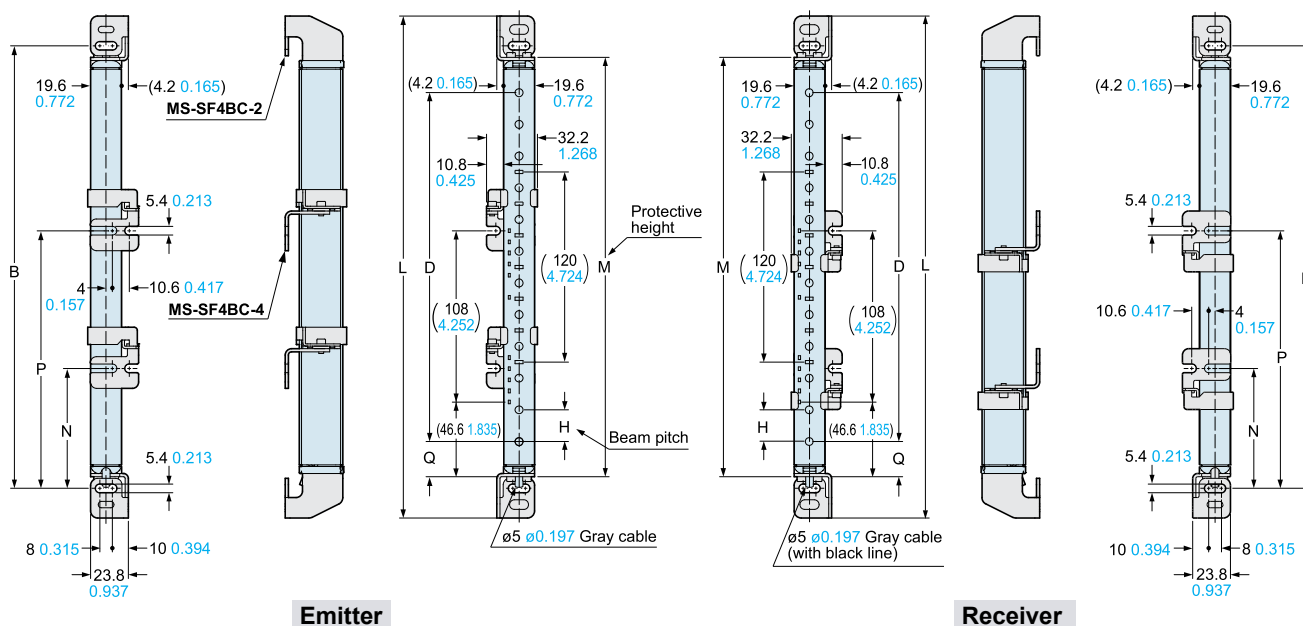

<Connector of the pigtailed type (with muting function) SF4B-□CA-J05>



| Model No. | B | D | | L | M | N | P |
|-------------------|--------------------------------------|------------------|------------------|-------------------|-------------------|-----------------|-------------------|
| | | SF4B-H□C (A-J05) | SF4B-A□C (A-J05) | | | | |
| SF4B-H12C (A-J05) | 279 10.984 | 220 8.661 | — | 316.4 12.457 | 264.4 10.409 | — | — |
| SF4B-H16C (A-J05) | SF4B-A8C (A-J05) 359 14.134 | 300 11.811 | 280 11.024 | 396.4 15.606 | 344.4 13.559 | — | — |
| SF4B-H20C (A-J05) | 439 17.283 | 380 14.961 | — | 476.4 18.756 | 424.4 16.709 | — | — |
| SF4B-H24C (A-J05) | SF4B-A12C (A-J05) 519 20.433 | 460 18.110 | 440 17.323 | 556.4 21.906 | 504.4 19.858 | — | — |
| SF4B-H28C (A-J05) | 599 23.583 | 540 21.260 | — | 636.4 25.055 | 584.4 23.008 | — | — |
| SF4B-H32C (A-J05) | SF4B-A16C (A-J05) 679 26.732 | 620 24.409 | 600 23.622 | 716.4 28.205 | 664.4 26.157 | — | — |
| SF4B-H36C (A-J05) | 759 29.882 | 700 27.559 | — | 796.4 31.354 | 744.4 29.307 | — | — |
| SF4B-H40C (A-J05) | SF4B-A20C (A-J05) 839 33.031 | 780 30.709 | 760 29.921 | 876.4 34.504 | 824.4 32.457 | 399.5 15.728 | — |
| SF4B-H48C (A-J05) | SF4B-A24C (A-J05) 999 39.331 | 940 37.008 | 920 36.220 | 1,036.4 40.803 | 984.4 38.756 | 479.5 18.878 | — |
| SF4B-H56C (A-J05) | SF4B-A28C (A-J05) 1,159 45.630 | 1,100 43.307 | 1,080 42.520 | 1,196.4 47.102 | 1,144.4 45.055 | 559.5 22.028 | — |
| SF4B-H64C (A-J05) | SF4B-A32C (A-J05) 1,319 51.929 | 1,260 49.606 | 1,240 48.819 | 1,356.4 53.402 | 1,304.4 51.354 | 419.5 16.516 | 858.5 33.799 |
| SF4B-H72C (A-J05) | SF4B-A36C (A-J05) 1,479 58.228 | 1,420 55.906 | 1,400 55.118 | 1,516.4 59.701 | 1,464.4 57.654 | 472.5 18.602 | 965.5 38.012 |
| SF4B-H80C (A-J05) | SF4B-A40C (A-J05) 1,639 64.528 | 1,580 62.205 | 1,560 61.417 | 1,676.4 66.000 | 1,624.4 63.953 | 525.5 20.689 | 1,072.5 42.224 |
| SF4B-H88C (A-J05) | SF4B-A44C (A-J05) 1,799 70.827 | 1,740 68.504 | 1,720 67.716 | 1,836.4 72.299 | 1,784.4 70.252 | 578.5 22.776 | 1,179.5 46.437 |
| SF4B-H96C (A-J05) | SF4B-A48C (A-J05) 1,959 77.126 | 1,900 74.803 | 1,880 74.016 | 1,996.4 78.598 | 1,944.4 76.551 | 631.5 24.862 | 1,286.5 50.650 |


| Model No. | H | Q |
|------------------|----------|------------|
| SF4B-H□C (A-J05) | 20 0.787 | 22.2 0.874 |
| SF4B-A□C (A-J05) | 40 1.575 | 42.2 1.661 |

SF4B-□CA-J05 SF4B-□C


Light curtain

Assembly dimensions

The figure depicts space-saving mounting using the rear utility mounting bracket **MS-SF4BC-2** (optional) and the intermediate supporting bracket for utility mounting bracket **MS-SF4BC-4** (optional).

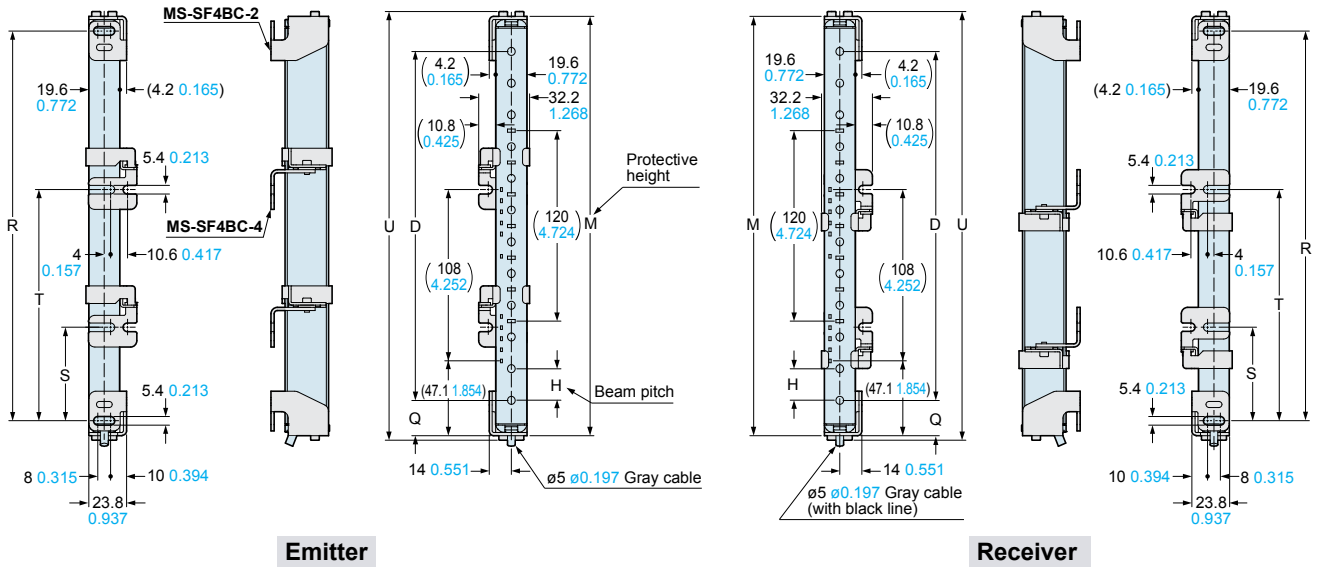

<Connector of the pigtailed type (with muting function) SF4B-□CA-J05>



| Model No. | D | | M | R | S | T | U |
|-------------------|-------------------|------------------|-----------------|-------------------|-------------------|-----------------|-------------------|
| | SF4B-H□C (A-J05) | SF4B-A□C (A-J05) | | | | | |
| SF4B-H12C (A-J05) | 220 8.661 | — | 264.4 10.409 | 245.8 9.677 | — | — | 270.4 10.646 |
| SF4B-H16C (A-J05) | SF4B-A8C (A-J05) | 300 11.811 | 280 11.024 | 344.4 13.559 | 325.8 12.827 | — | 350.4 13.795 |
| SF4B-H20C (A-J05) | — | 380 14.961 | — | 424.4 16.709 | 405.8 17.748 | — | 430.4 16.945 |
| SF4B-H24C (A-J05) | SF4B-A12C (A-J05) | 460 18.110 | 440 17.323 | 504.4 19.858 | 485.8 19.126 | — | 510.4 20.094 |
| SF4B-H28C (A-J05) | — | 540 21.260 | — | 584.4 23.008 | 565.8 22.276 | — | 590.4 23.244 |
| SF4B-H32C (A-J05) | SF4B-A16C (A-J05) | 620 24.409 | 600 23.622 | 664.4 26.157 | 645.8 25.425 | — | 670.4 26.394 |
| SF4B-H36C (A-J05) | — | 700 27.559 | — | 744.4 29.307 | 725.8 28.575 | — | 750.4 29.543 |
| SF4B-H40C (A-J05) | SF4B-A20C (A-J05) | 780 30.709 | 760 29.921 | 824.4 32.457 | 805.8 31.724 | 382.9 15.075 | 830.4 32.693 |
| SF4B-H48C (A-J05) | SF4B-A24C (A-J05) | 940 37.008 | 920 36.220 | 984.4 38.756 | 965.8 38.024 | 462.9 18.224 | 990.4 38.992 |
| SF4B-H56C (A-J05) | SF4B-A28C (A-J05) | 1,100 43.307 | 1,080 42.520 | 1,144.4 45.055 | 1,125.8 44.323 | 542.9 21.374 | 1,150.4 45.291 |
| SF4B-H64C (A-J05) | SF4B-A32C (A-J05) | 1,260 49.606 | 1,240 48.819 | 1,304.4 51.354 | 1,285.8 50.622 | 402.9 15.862 | 841.9 33.146 |
| SF4B-H72C (A-J05) | SF4B-A36C (A-J05) | 1,420 55.906 | 1,400 55.118 | 1,464.4 57.654 | 1,445.8 56.921 | 455.9 17.949 | 948.9 37.358 |
| SF4B-H80C (A-J05) | SF4B-A40C (A-J05) | 1,580 62.205 | 1,560 61.417 | 1,624.4 63.953 | 1,605.8 63.220 | 508.9 20.035 | 1,055.9 41.571 |
| SF4B-H88C (A-J05) | SF4B-A44C (A-J05) | 1,740 68.504 | 1,720 67.716 | 1,784.4 70.252 | 1,765.8 69.520 | 561.9 22.122 | 1,162.9 45.783 |
| SF4B-H96C (A-J05) | SF4B-A48C (A-J05) | 1,900 74.803 | 1,880 74.016 | 1,944.4 76.551 | 1,925.8 75.819 | 614.9 24.209 | 1,269.9 49.996 |

| Model No. | H | Q |
|------------------|----------|------------|
| SF4B-H□C (A-J05) | 20 0.787 | 22.2 0.874 |
| SF4B-A□C (A-J05) | 40 1.575 | 42.2 1.661 |

DIMENSIONS (Unit: mm in)


The CAD data in the dimensions can be downloaded from our website.

SF4B-□CA-J05 SF4B-□C


Light curtain

Assembly dimensions

The figure depicts side mounting using the side utility mounting bracket **MS-SF4BC-3** (optional) and the intermediate supporting bracket for utility mounting bracket **MS-SF4BC-4** (optional).

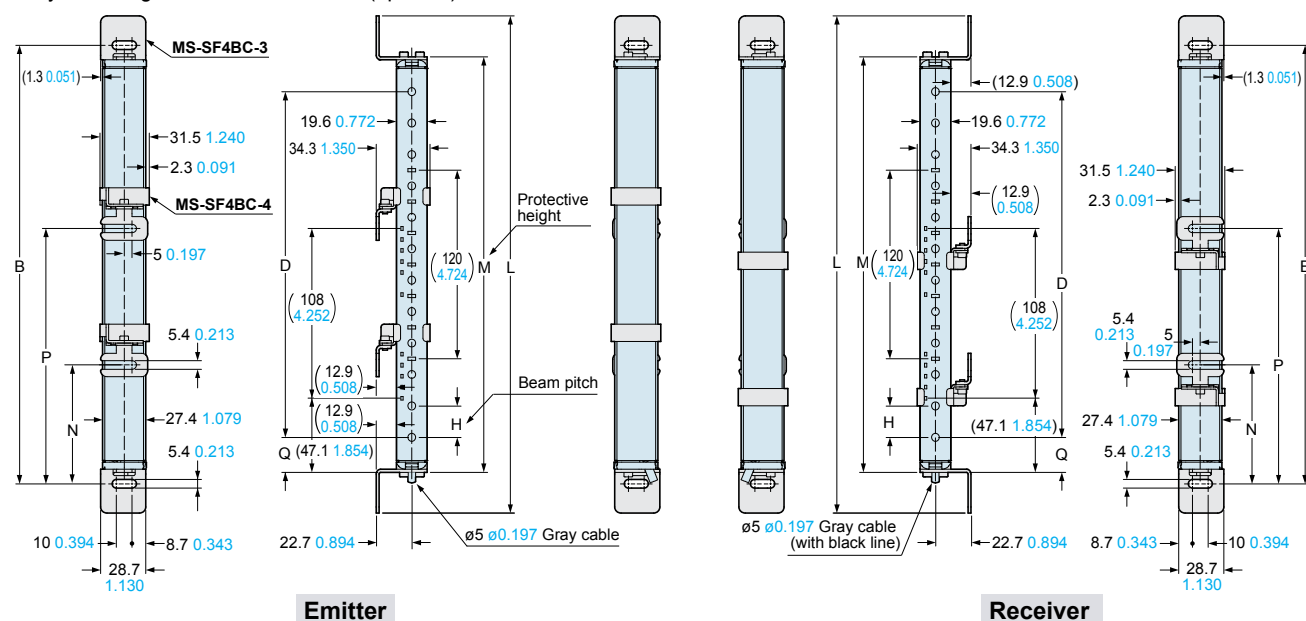

<Connector of the pigtailed type (with muting function) SF4B-□CA-J05>



| Model No. | B | D | | L | M | N | P |
|-------------------|--------------------------------------|------------------|------------------|-----------------|-----------------|-------------------|-------------------|
| | | SF4B-H□C (A-J05) | SF4B-A□C (A-J05) | | | | |
| SF4B-H12C (A-J05) | 279 10.984 | 220 | 8.661 | 316.4 12.457 | 264.4 10.409 | — | — |
| SF4B-H16C (A-J05) | SF4B-A8C (A-J05) 359 14.134 | 300 | 11.811 | 280 | 11.024 | 396.4 15.606 | 344.4 13.559 |
| SF4B-H20C (A-J05) | 439 17.283 | 380 | 14.961 | — | — | 476.4 18.756 | 424.4 16.709 |
| SF4B-H24C (A-J05) | SF4B-A12C (A-J05) 519 20.433 | 460 | 18.110 | 440 | 17.323 | 556.4 21.906 | 504.4 19.858 |
| SF4B-H28C (A-J05) | 599 23.583 | 540 | 21.260 | — | — | 636.4 25.055 | 584.4 23.008 |
| SF4B-H32C (A-J05) | SF4B-A16C (A-J05) 679 26.732 | 620 | 24.409 | 600 | 23.622 | 716.4 28.205 | 664.4 26.157 |
| SF4B-H36C (A-J05) | 759 29.882 | 700 | 27.559 | — | — | 796.4 31.354 | 744.4 29.307 |
| SF4B-H40C (A-J05) | SF4B-A20C (A-J05) 839 33.031 | 780 | 30.709 | 760 | 29.921 | 876.4 34.504 | 824.4 32.457 |
| SF4B-H48C (A-J05) | SF4B-A24C (A-J05) 999 39.331 | 940 | 37.008 | 920 | 36.220 | 1,036.4 40.803 | 984.4 38.756 |
| SF4B-H56C (A-J05) | SF4B-A28C (A-J05) 1,159 45.630 | 1,100 | 43.307 | 1,080 | 42.520 | 1,196.4 47.102 | 1,144.4 45.055 |
| SF4B-H64C (A-J05) | SF4B-A32C (A-J05) 1,319 51.929 | 1,260 | 49.606 | 1,240 | 48.819 | 1,356.4 53.402 | 1,304.4 51.354 |
| SF4B-H72C (A-J05) | SF4B-A36C (A-J05) 1,479 58.228 | 1,420 | 55.906 | 1,400 | 55.118 | 1,516.4 59.701 | 1,464.4 57.654 |
| SF4B-H80C (A-J05) | SF4B-A40C (A-J05) 1,639 64.528 | 1,580 | 62.205 | 1,560 | 61.417 | 1,676.4 66.000 | 1,624.4 63.953 |
| SF4B-H88C (A-J05) | SF4B-A44C (A-J05) 1,799 70.827 | 1,740 | 68.504 | 1,720 | 67.716 | 1,836.4 72.299 | 1,784.4 70.252 |
| SF4B-H96C (A-J05) | SF4B-A48C (A-J05) 1,959 77.126 | 1,900 | 74.803 | 1,880 | 74.016 | 1,996.4 78.598 | 1,944.4 76.551 |


| Model No. | H | Q |
|------------------|----------|------------|
| SF4B-H□C (A-J05) | 20 0.787 | 22.2 0.874 |
| SF4B-A□C (A-J05) | 40 1.575 | 42.2 1.661 |

SF4B-□CA-J05 SF4B-□C


Light curtain

Assembly dimensions

The figure depicts space-saving mounting using the side utility mounting bracket **MS-SF4BC-3** (optional) and the intermediate supporting bracket for utility mounting bracket **MS-SF4BC-4** (optional).

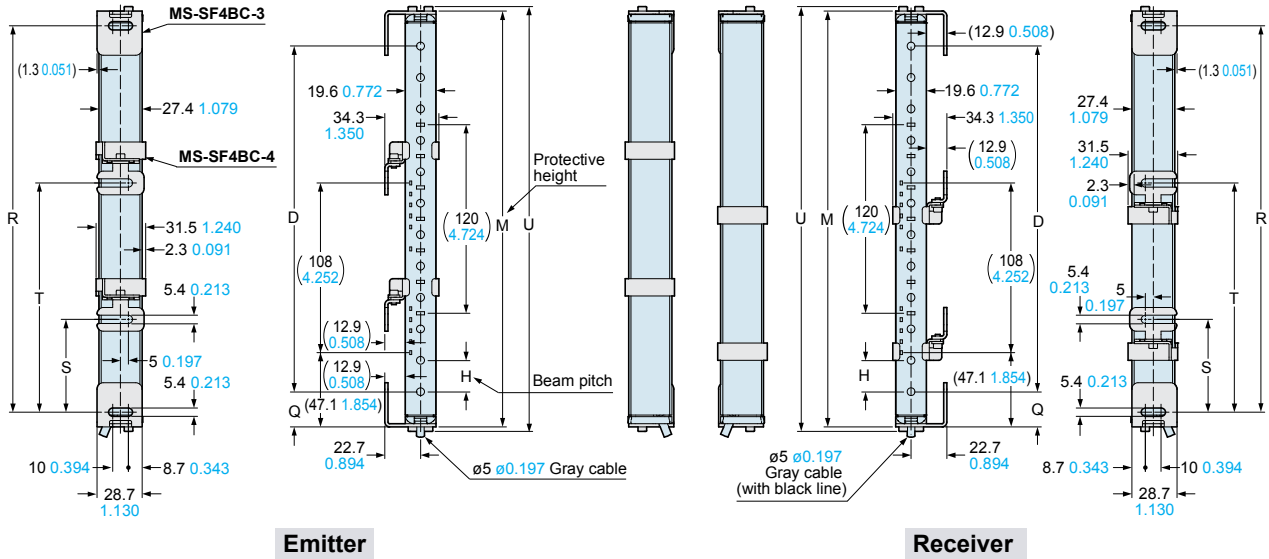

<Connector of the pigtailed type (with muting function) SF4B-□CA-J05>



| Model No. | D | | M | R | S | T | U |
|-------------------|-----------------------------------|------------------|-------------------|-------------------|-----------------|-------------------|-------------------|
| | SF4B-H□C (A-J05) | SF4B-A□C (A-J05) | | | | | |
| SF4B-H12C (A-J05) | 220 8.661 | — | 264.4 10.409 | 245.8 9.677 | — | — | 270.4 10.646 |
| SF4B-H16C (A-J05) | SF4B-A8C (A-J05) 300 11.811 | 280 11.024 | 344.4 13.559 | 325.8 12.827 | — | — | 350.4 13.795 |
| SF4B-H20C (A-J05) | 380 14.961 | — | 424.4 16.709 | 405.8 17.748 | — | — | 430.4 16.945 |
| SF4B-H24C (A-J05) | SF4B-A12C (A-J05) 460 18.110 | 440 17.323 | 504.4 19.858 | 485.8 19.126 | — | — | 510.4 20.094 |
| SF4B-H28C (A-J05) | 540 21.260 | — | 584.4 23.008 | 565.8 22.276 | — | — | 590.4 23.244 |
| SF4B-H32C (A-J05) | SF4B-A16C (A-J05) 620 24.409 | 600 23.622 | 664.4 26.157 | 645.8 25.425 | — | — | 670.4 26.394 |
| SF4B-H36C (A-J05) | 700 27.559 | — | 744.4 29.307 | 725.8 28.575 | — | — | 750.4 29.543 |
| SF4B-H40C (A-J05) | SF4B-A20C (A-J05) 780 30.709 | 760 29.921 | 824.4 32.457 | 805.8 31.724 | 382.9 15.075 | — | 830.4 32.693 |
| SF4B-H48C (A-J05) | SF4B-A24C (A-J05) 940 37.008 | 920 36.220 | 984.4 38.756 | 965.8 38.024 | 462.9 18.224 | — | 990.4 38.992 |
| SF4B-H56C (A-J05) | SF4B-A28C (A-J05) 1,100 43.307 | 1,080 42.520 | 1,144.4 45.055 | 1,125.8 44.323 | 542.9 21.374 | — | 1,150.4 45.291 |
| SF4B-H64C (A-J05) | SF4B-A32C (A-J05) 1,260 49.606 | 1,240 48.819 | 1,304.4 51.354 | 1,285.8 50.622 | 402.9 15.862 | 841.9 33.146 | 1,310.4 51.590 |
| SF4B-H72C (A-J05) | SF4B-A36C (A-J05) 1,420 55.906 | 1,400 55.118 | 1,464.4 57.654 | 1,445.8 56.921 | 455.9 17.949 | 948.9 37.358 | 1,470.4 57.890 |
| SF4B-H80C (A-J05) | SF4B-A40C (A-J05) 1,580 62.205 | 1,560 61.417 | 1,624.4 63.953 | 1,605.8 63.220 | 508.9 20.035 | 1,055.9 41.571 | 1,630.4 64.189 |
| SF4B-H88C (A-J05) | SF4B-A44C (A-J05) 1,740 68.504 | 1,720 67.716 | 1,784.4 70.252 | 1,765.8 69.520 | 561.9 22.122 | 1,162.9 45.783 | 1,790.4 70.488 |
| SF4B-H96C (A-J05) | SF4B-A48C (A-J05) 1,900 74.803 | 1,880 74.016 | 1,944.4 76.551 | 1,925.8 75.819 | 614.9 24.209 | 1,269.9 49.996 | 1,950.4 76.787 |

| Model No. | H | Q |
|------------------|----------|------------|
| SF4B-H□C (A-J05) | 20 0.787 | 22.2 0.874 |
| SF4B-A□C (A-J05) | 40 1.575 | 42.2 1.661 |

DIMENSIONS (Unit: mm in)


The CAD data in the dimensions can be downloaded from our website.

SF4B-□CA-J05 SF4B-□C


Light curtain

Assembly dimensions

The figure depicts side mounting using the side mounting bracket **MS-SF4BC-6** (optional) and the intermediate supporting bracket for side mounting bracket **MS-SF4BC-7** (optional).

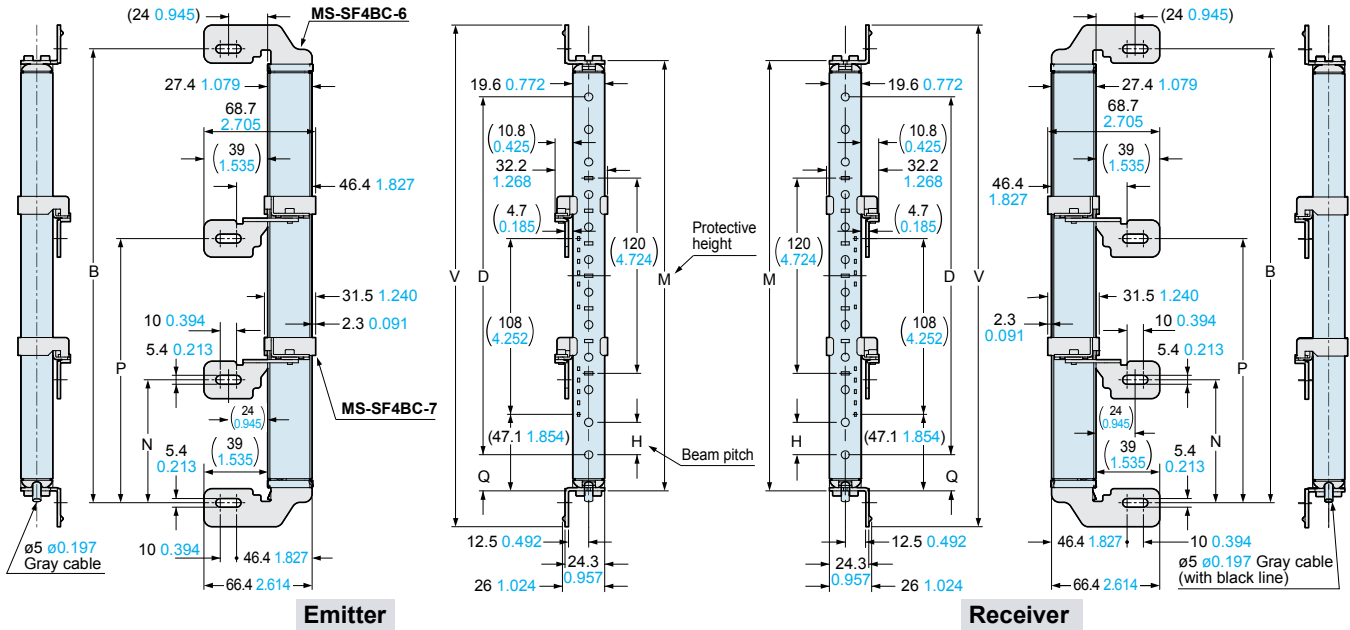

<Connector of the pigtailed type (with muting function) SF4B-□CA-J05>



| Model No. | B | D | | M | N | P | V |
|-------------------|--------------------------------------|------------------|------------------|-------------------|-----------------|-------------------|-------------------|
| | | SF4B-H□C (A-J05) | SF4B-A□C (A-J05) | | | | |
| SF4B-H12C (A-J05) | 279 10.984 | 220 8.661 | — | 264.4 10.409 | — | — | 308.4 12.142 |
| SF4B-H16C (A-J05) | SF4B-A8C (A-J05) 359 14.134 | 300 11.811 | 280 11.024 | 344.4 13.559 | — | — | 388.4 15.291 |
| SF4B-H20C (A-J05) | 439 17.283 | 380 14.961 | — | 424.4 16.709 | — | — | 468.4 18.441 |
| SF4B-H24C (A-J05) | SF4B-A12C (A-J05) 519 20.433 | 460 18.110 | 440 17.323 | 504.4 19.858 | — | — | 548.4 21.591 |
| SF4B-H28C (A-J05) | 599 23.583 | 540 21.260 | — | 584.4 23.008 | — | — | 628.4 24.740 |
| SF4B-H32C (A-J05) | SF4B-A16C (A-J05) 679 26.732 | 620 24.409 | 600 23.622 | 664.4 26.157 | — | — | 708.4 27.890 |
| SF4B-H36C (A-J05) | 759 29.882 | 700 27.559 | — | 744.4 29.307 | — | — | 788.4 31.039 |
| SF4B-H40C (A-J05) | SF4B-A20C (A-J05) 839 33.031 | 780 30.709 | 760 29.921 | 824.4 32.457 | 399.5 15.728 | — | 868.4 34.189 |
| SF4B-H48C (A-J05) | SF4B-A24C (A-J05) 999 39.331 | 940 37.008 | 920 36.220 | 984.4 38.756 | 479.5 18.878 | — | 1,028.4 40.488 |
| SF4B-H56C (A-J05) | SF4B-A28C (A-J05) 1,159 45.630 | 1,100 43.307 | 1,080 42.520 | 1,144.4 45.055 | 559.5 22.028 | — | 1,188.4 46.787 |
| SF4B-H64C (A-J05) | SF4B-A32C (A-J05) 1,319 51.929 | 1,260 49.606 | 1,240 48.819 | 1,304.4 51.354 | 419.5 16.516 | 858.5 33.799 | 1,348.4 53.087 |
| SF4B-H72C (A-J05) | SF4B-A36C (A-J05) 1,479 58.228 | 1,420 55.906 | 1,400 55.118 | 1,464.4 57.654 | 472.5 18.602 | 965.5 38.012 | 1,508.4 59.386 |
| SF4B-H80C (A-J05) | SF4B-A40C (A-J05) 1,639 64.528 | 1,580 62.205 | 1,560 61.417 | 1,624.4 63.953 | 525.5 20.689 | 1,072.5 42.224 | 1,668.4 65.685 |
| SF4B-H88C (A-J05) | SF4B-A44C (A-J05) 1,799 70.827 | 1,740 68.504 | 1,720 67.716 | 1,784.4 70.252 | 578.5 22.776 | 1,179.5 46.437 | 1,828.4 71.984 |
| SF4B-H96C (A-J05) | SF4B-A48C (A-J05) 1,959 77.126 | 1,900 74.803 | 1,880 74.016 | 1,944.4 76.551 | 631.5 24.862 | 1,286.5 50.650 | 1,988.4 78.283 |


| Model No. | H | Q |
|------------------|----------|------------|
| SF4B-H□C (A-J05) | 20 0.787 | 22.2 0.874 |
| SF4B-A□C (A-J05) | 40 1.575 | 42.2 1.661 |

SF4B-□CA-J05 SF4B-□C


Light curtain

Assembly dimensions

The figure depicts space-saving mounting using the side mounting bracket **MS-SF4BC-6** (optional) and the intermediate supporting bracket for side mounting bracket **MS-SF4BC-7** (optional).

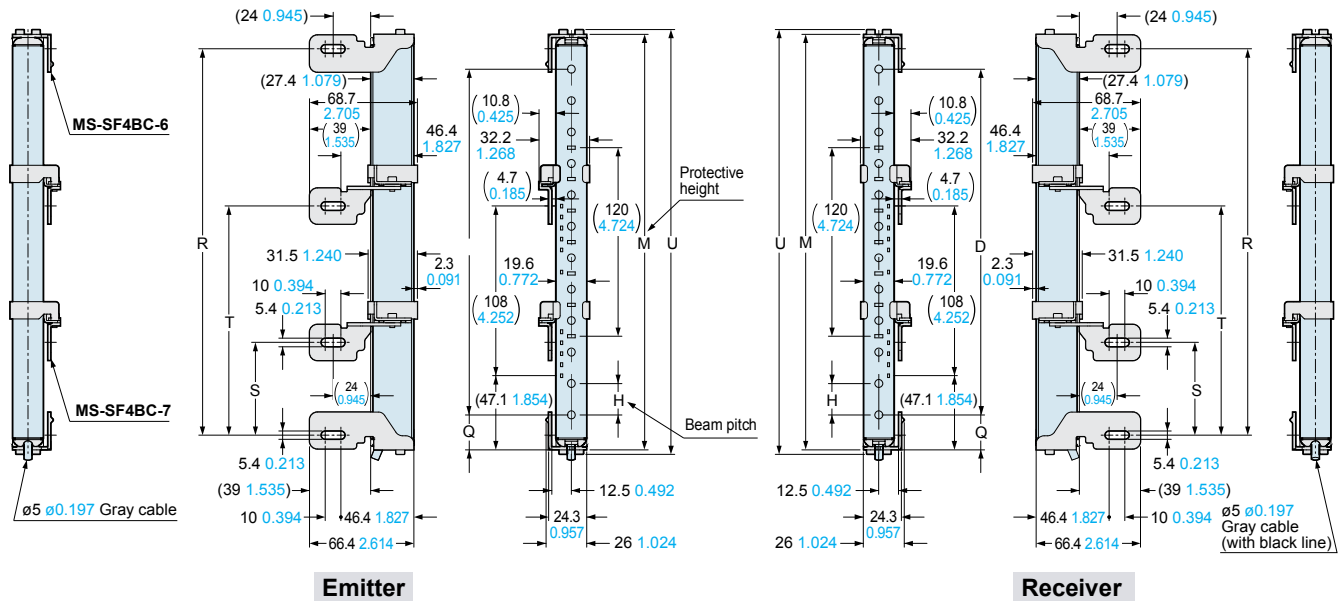

<Connector of the pigtailed type (with muting function) SF4B-□CA-J05>



| Model No. | D | | M | R | S | T | U |
|-------------------|-----------------------------------|------------------|-------------------|-------------------|-----------------|-------------------|-------------------|
| | SF4B-H□C (A-J05) | SF4B-A□C (A-J05) | | | | | |
| SF4B-H12C (A-J05) | 220 8.661 | — | 264.4 10.409 | 245.8 9.677 | — | — | 270.4 10.646 |
| SF4B-H16C (A-J05) | SF4B-A8C (A-J05) 300 11.811 | 280 11.024 | 344.4 13.559 | 325.8 12.827 | — | — | 350.4 13.795 |
| SF4B-H20C (A-J05) | 380 14.961 | — | 424.4 16.709 | 405.8 17.748 | — | — | 430.4 16.945 |
| SF4B-H24C (A-J05) | SF4B-A12C (A-J05) 460 18.110 | 440 17.323 | 504.4 19.858 | 485.8 19.126 | — | — | 510.4 20.094 |
| SF4B-H28C (A-J05) | 540 21.260 | — | 584.4 23.008 | 565.8 22.276 | — | — | 590.4 23.244 |
| SF4B-H32C (A-J05) | SF4B-A16C (A-J05) 620 24.409 | 600 23.622 | 664.4 26.157 | 645.8 25.425 | — | — | 670.4 26.394 |
| SF4B-H36C (A-J05) | 700 27.559 | — | 744.4 29.307 | 725.8 28.575 | — | — | 750.4 29.543 |
| SF4B-H40C (A-J05) | SF4B-A20C (A-J05) 780 30.709 | 760 29.921 | 824.4 32.457 | 805.8 31.724 | 382.9 15.075 | — | 830.4 32.693 |
| SF4B-H48C (A-J05) | SF4B-A24C (A-J05) 940 37.008 | 920 36.220 | 984.4 38.756 | 965.8 38.024 | 462.9 18.224 | — | 990.4 38.992 |
| SF4B-H56C (A-J05) | SF4B-A28C (A-J05) 1,100 43.307 | 1,080 42.520 | 1,144.4 45.055 | 1,125.8 44.323 | 542.9 21.374 | — | 1,150.4 45.291 |
| SF4B-H64C (A-J05) | SF4B-A32C (A-J05) 1,260 49.606 | 1,240 48.819 | 1,304.4 51.354 | 1,285.8 50.622 | 402.9 15.862 | 841.9 33.146 | 1,310.4 51.590 |
| SF4B-H72C (A-J05) | SF4B-A36C (A-J05) 1,420 55.906 | 1,400 55.118 | 1,464.4 57.654 | 1,445.8 56.921 | 455.9 17.949 | 948.9 37.358 | 1,470.4 57.890 |
| SF4B-H80C (A-J05) | SF4B-A40C (A-J05) 1,580 62.205 | 1,560 61.417 | 1,624.4 63.953 | 1,605.8 63.220 | 508.9 20.035 | 1,055.9 41.571 | 1,630.4 64.189 |
| SF4B-H88C (A-J05) | SF4B-A44C (A-J05) 1,740 68.504 | 1,720 67.716 | 1,784.4 70.252 | 1,765.8 69.520 | 561.9 22.122 | 1,162.9 45.783 | 1,790.4 70.488 |
| SF4B-H96C (A-J05) | SF4B-A48C (A-J05) 1,900 74.803 | 1,880 74.016 | 1,944.4 76.551 | 1,925.8 75.819 | 614.9 24.209 | 1,269.9 49.996 | 1,950.4 76.787 |


| Model No. | H | Q |
|------------------|----------|------------|
| SF4B-H□C (A-J05) | 20 0.787 | 22.2 0.874 |
| SF4B-A□C (A-J05) | 40 1.575 | 42.2 1.661 |

DIMENSIONS (Unit: mm in)

The CAD data in the dimensions can be downloaded from our website.


MS-SF4BC-1

Standard mounting bracket (optional)

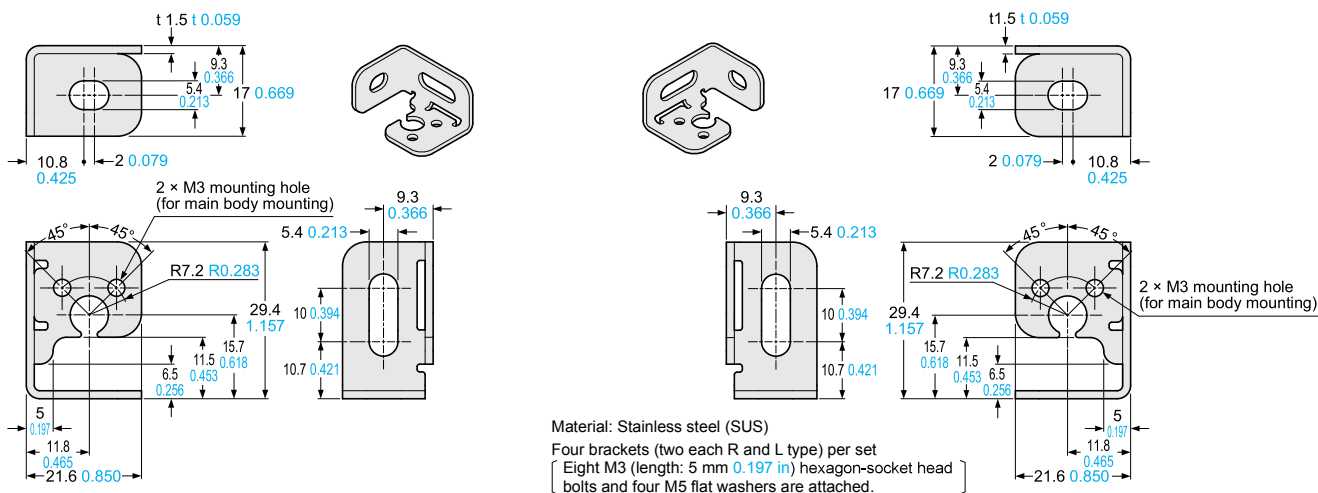


MS-SF4BC-2

Rear utility mounting bracket (optional)

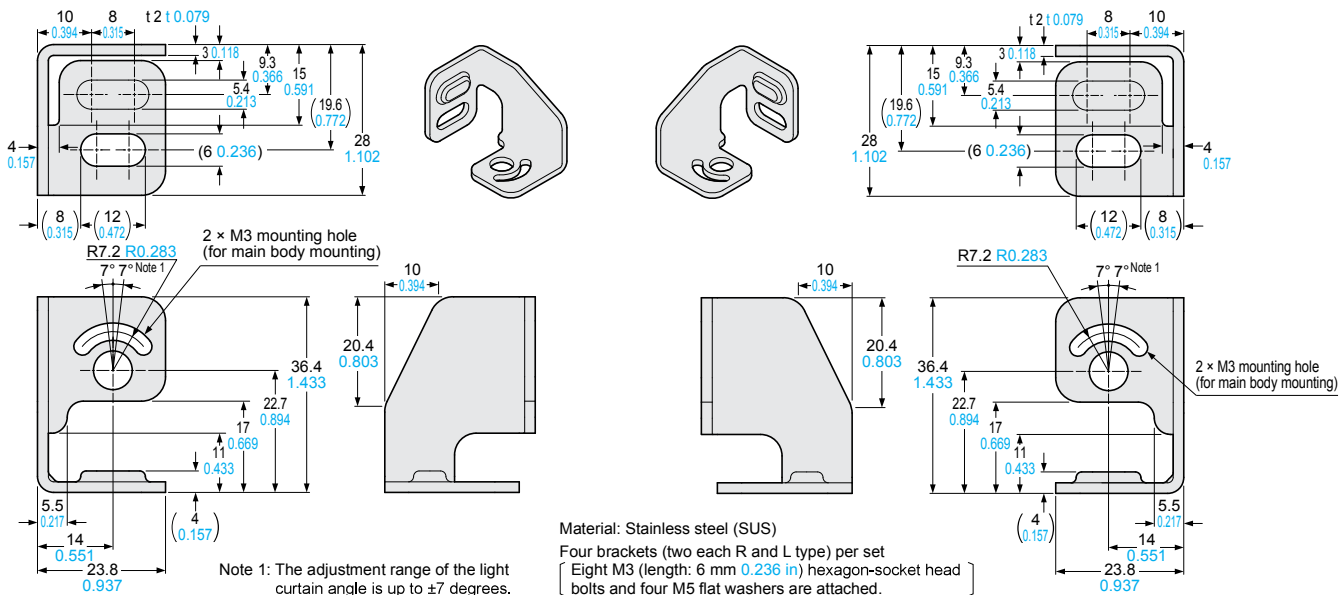

MS-SF4BC-3

Side utility mounting bracket (optional)

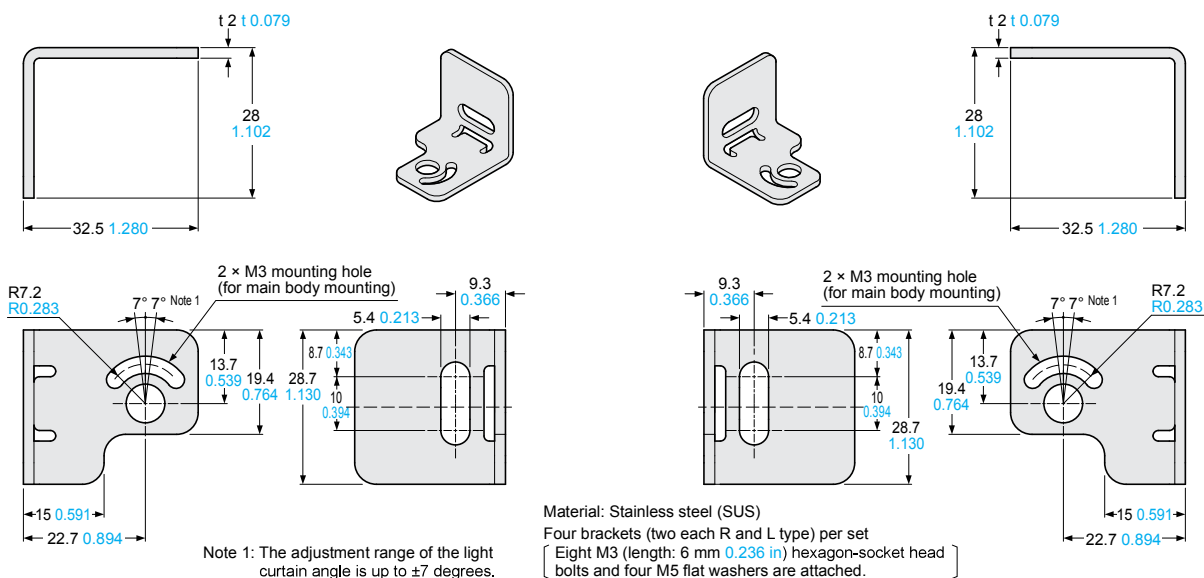

DIMENSIONS (Unit: mm in)



The CAD data in the dimensions can be downloaded from our website.

MS-SF4BC-4

Intermediate supporting bracket for utility mounting bracket (optional)

<For rear mounting>

<For side mounting>

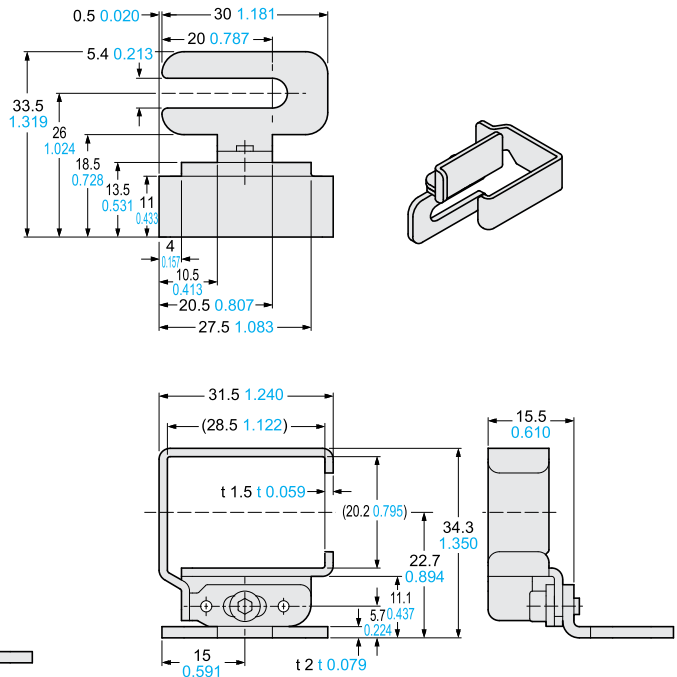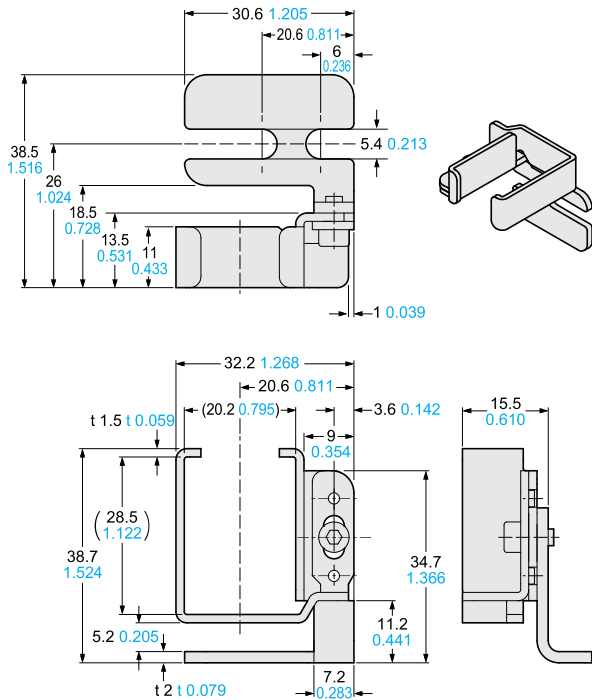

Material: Stainless steel (SUS)

Two pcs. M5 flat washers, two pcs. assembled M3 (length: 6 mm 0.236 in) hexagon-socket head bolts for rear mounting, two pcs. attachments for side mounting

Note: The numbers of sets required by SF4B-H□C (A-J05) (40 or more beam axes) and SF4B-A□C (A-J05) (20 or more beam axes) are as follows:



- SF4B-H40C (A-J05), SF4B-H48C (A-J05), SF4B-H56C (A-J05), SF4B-A20C (A-J05), SF4B-A24C (A-J05), SF4B-A28C (A-J05): 1 set
- SF4B-H64C (A-J05), SF4B-H72C (A-J05), SF4B-H80C (A-J05), SF4B-A32C (A-J05), SF4B-A36C (A-J05), SF4B-A40C (A-J05): 2 sets

MS-SF4BC-5

Intermediate supporting bracket for standard mounting bracket (optional)

<For rear mounting>

<For side mounting>

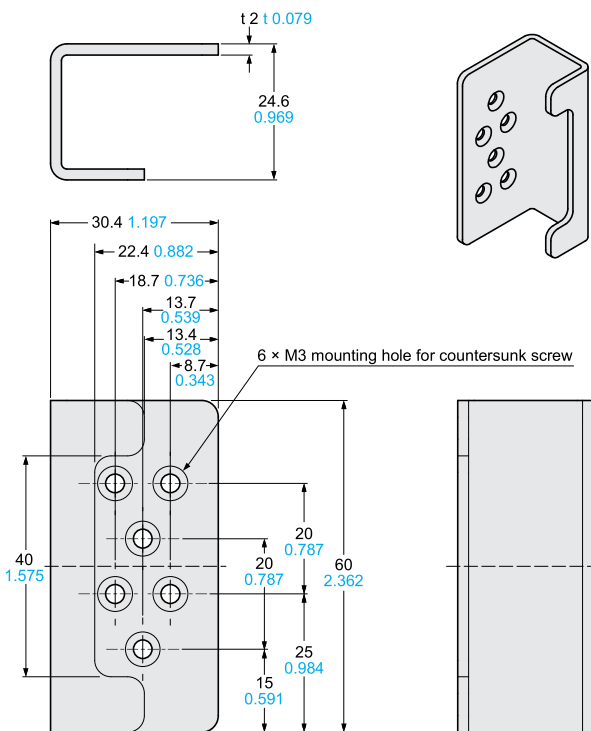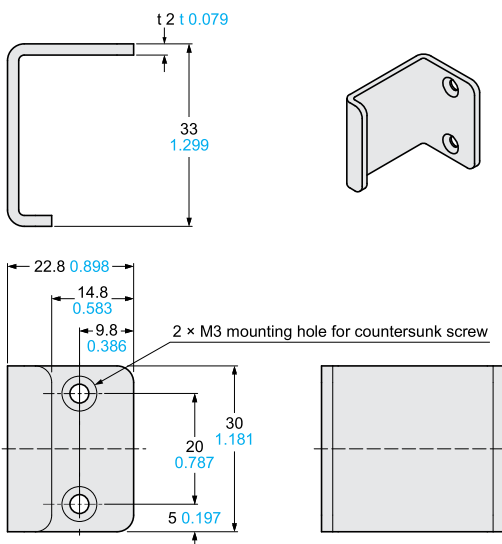

Material: Stainless steel (SUS)

Two pcs. for rear mounting, two pcs. for side mounting

Note: The numbers of sets required by SF4B-H□C (A-J05) (40 or more beam axes) and SF4B-A□C (A-J05) (20 or more beam axes) are as follows:


- SF4B-H40C (A-J05), SF4B-H48C (A-J05), SF4B-H56C (A-J05), SF4B-A20C (A-J05), SF4B-A24C (A-J05), SF4B-A28C (A-J05): 1 set
- SF4B-H64C (A-J05), SF4B-H72C (A-J05), SF4B-H80C (A-J05), SF4B-A32C (A-J05), SF4B-A36C (A-J05), SF4B-A40C (A-J05): 2 sets

DIMENSIONS (Unit: mm in)

The CAD data in the dimensions can be downloaded from our website.

MS-SF4BC-6

Side mounting bracket (optional)

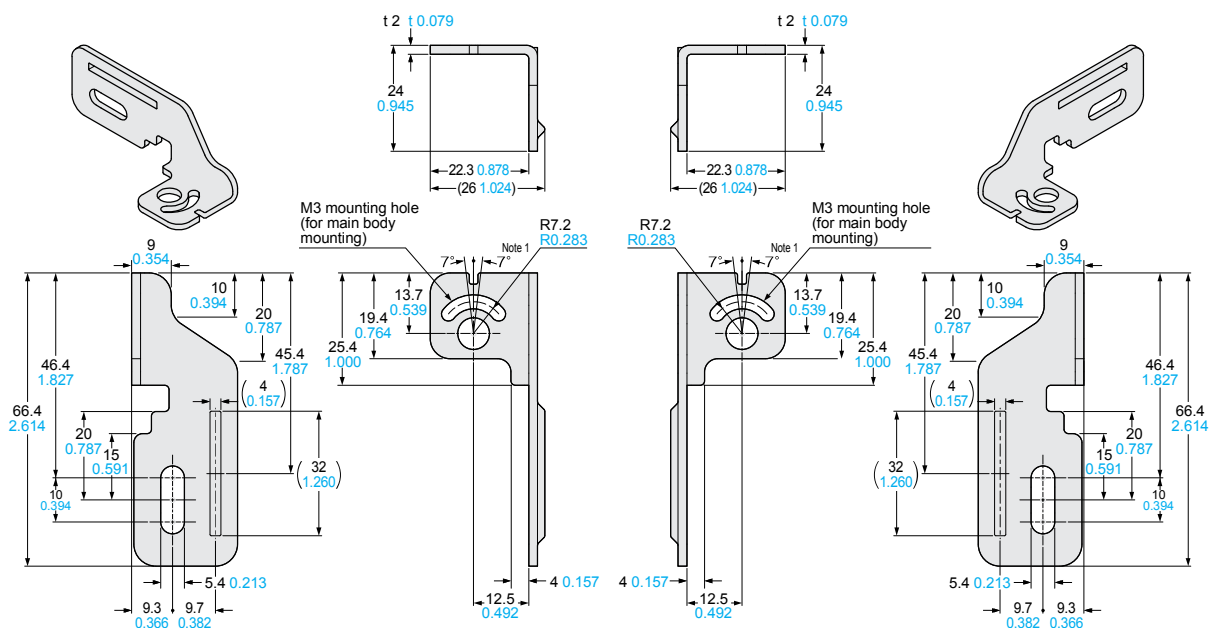


Material: Stainless steel (SUS)

Four brackets (two each L and R type) per set
 [Eight M3 (length: 6 mm 0.236 in) hexagon-socket head]
 bolts and four M5 flat washers are attached.

Note 1: The adjustment range of the light curtain angle is up to ±7 degrees.

MS-SF4BC-7

Intermediate supporting bracket for side mounting bracket (optional)


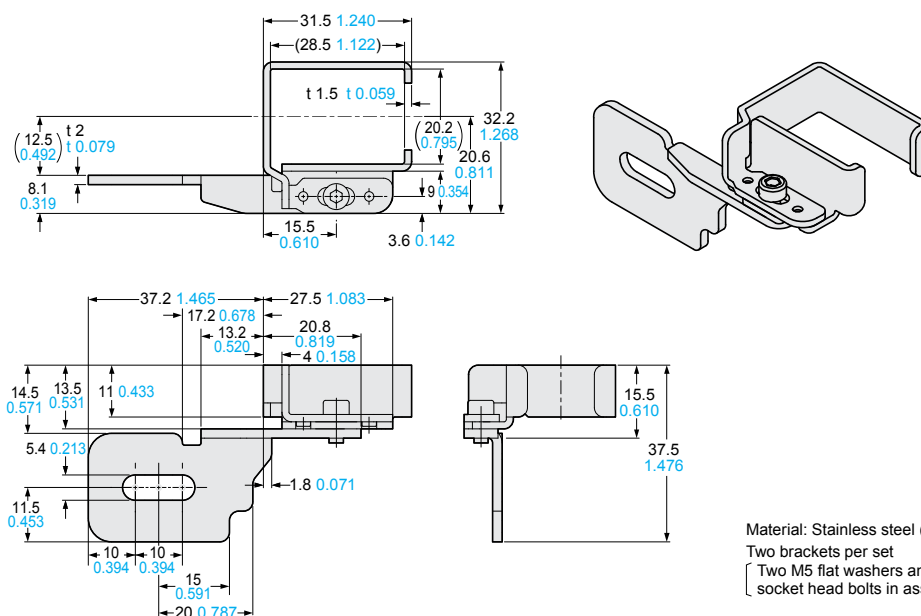


Material: Stainless steel (SUS)

Two brackets per set
 [Two M5 flat washers and M3 (length: 6 mm 0.236 in) hexagon-socket head bolts in assembled state are attached.

SFB-CC□-MU Mating cable with connector on one end (optional)

SFB-CCJ□-MU Mating cable with connectors on both ends (optional)

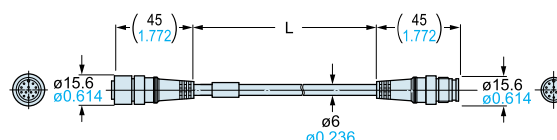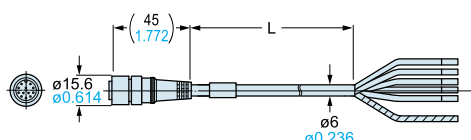

• Length: L

| Model No. | Length: L |
|--------------------|----------------|
| SFB-CC3-MU | 3,000 118.110 |
| SFB-CC7-MU | 7,000 275.591 |
| SFB-CC10-MU | 10,000 393.701 |

• Length: L


| Model No. | Length: L |
|----------------------|----------------|
| SFB-CCJ3D-MU | 3,000 118.110 |
| SFB-CCJ3E-MU | |
| SFB-CCJ10D-MU | 10,000 393.701 |
| SFB-CCJ10E-MU | |

DIMENSIONS (Unit: mm in)

The CAD data in the dimensions can be downloaded from our website.


SF-C13

Control unit (optional)

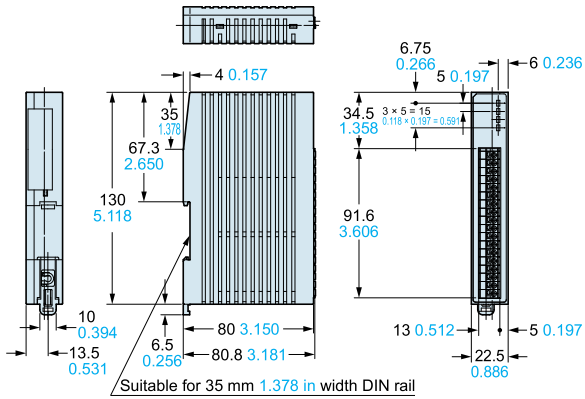


SFB-HC

Handy-controller (optional)

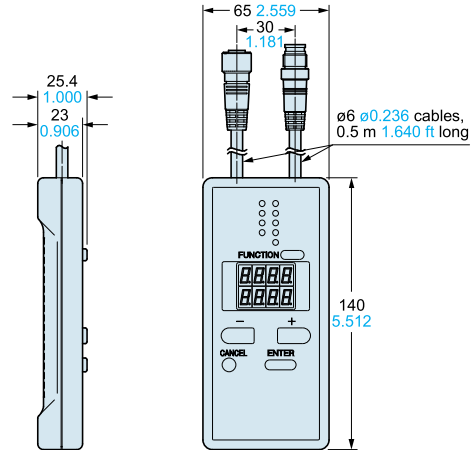

SF-IND-2

Large display unit for light curtain (optional)

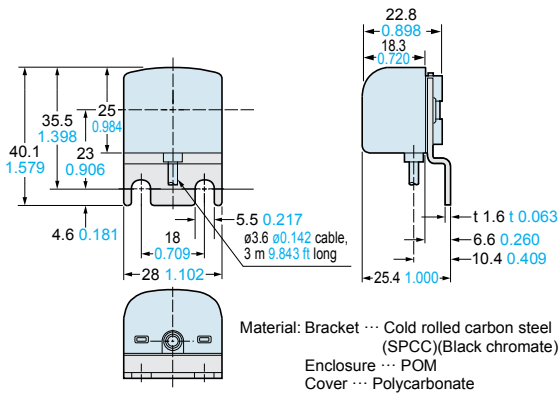

Please contact

Panasonic Industrial Devices SUNX Co., Ltd.

2431-1 Ushiyama-cho, Kasugai-shi, Aichi, 486-0901, Japan

Global Sales Department

■Telephone: +81-568-33-7861 ■Facsimile: +81-568-33-8591

panasonic.net/id/pidsx/global

